

General Product Information

This product is for indoor dry and damp locations only.

Preferred Installation: Mounts directly to a standard single-gang junction box for a clean, low-profile appearance.

Alternative Junction box Compatibility: Mounts to a 4" octagonal or 4" square junction box with a round plaster ring, which requires the use of the included 5" round white canopy.

It is the installer's responsibility to ensure that the site conditions, junction box, and fasteners used are suitable to support the weight of the fixture.


Damage due to incorrect connections can be detected at the factory and is not covered under warranty.

CAUTION - RISK OF FIRE


This product requires installation by a qualified electrician. Before installing be sure to read all instructions and TURN POWER OFF TO THE JUNCTION BOX.



Wiring Diagram

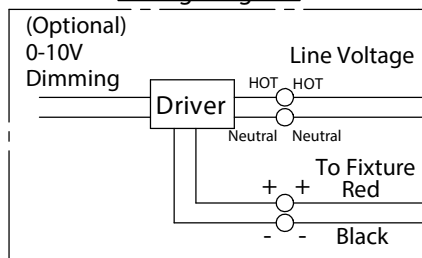

See Label on Driver for Wire Colors

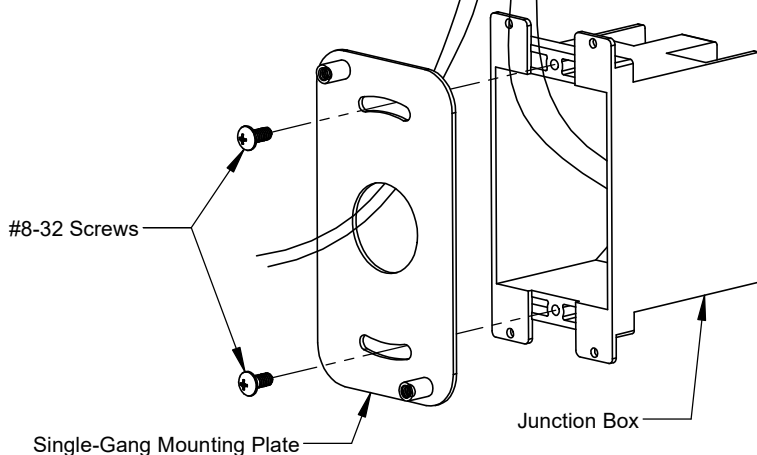

Installing the Mounting Plate and Wiring the Fixture (Preferred)

- ① Make electrical connections between the driver input leads and line voltage wires.


CRITICAL NOTE

If 0-10 V Dimming is not used, the tinned ended of the 0-10 V driver leads should be snipped off and capped individually such that they remain isolated from one another


- ② Attach the mounting plate to the junction box using the supplied #8-32 screws. Orient the plate so it is level.
- ③ Pull the driver output leads through the center hole of the mounting plate.



Wiring Diagram

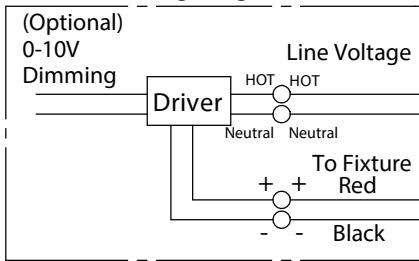

See Label on Driver for Wire Colors

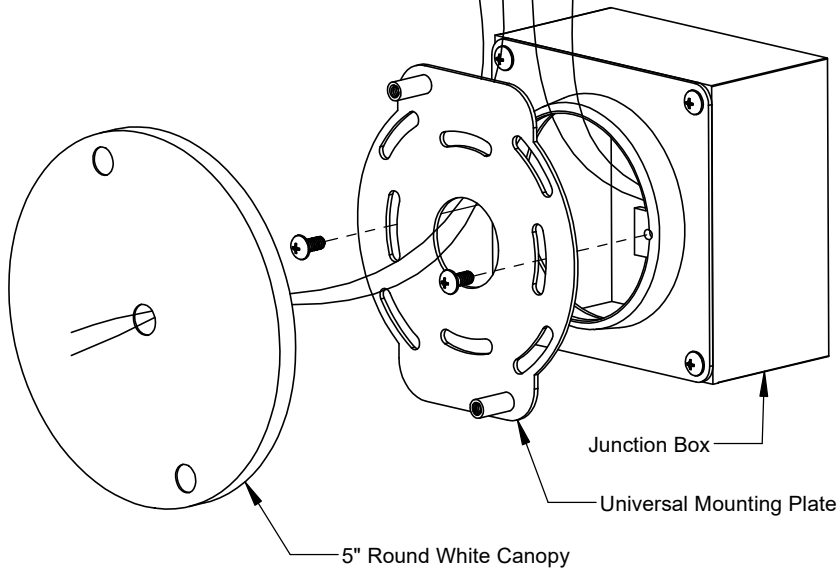

Installing the Fixture

- ④ Connect the driver output wires to the fixture input wires with wire nuts and place all wires and connections in the junction box
- ⑤ Back out the set screws on the top and bottom of the wood hub using a 5/64" Allen key.
- ⑥ Slide the fixture onto the posts protruding from the mounting plate until the wood hub is flush with the wall.
- ⑦ Tighten the two set screws in the top and bottom of the wood hub with a 5/64" hex key.

Installing the Mounting Plate and Wiring the Fixture (Alternate)

- ① Make electrical connections between the driver input leads and line voltage wires.

CRITICAL NOTE

If 0-10 V Dimming is not used, the tinned ended of the 0-10 V driver leads should be snipped off and capped individually such that they remain isolated from one another

- ② Attach the mounting plate to the junction box using the supplied #8-32 screws. Orient the plate so it is level.
- ③ Pull the driver output leads through the center hole of the mounting plate and canopy and slip the canopy over the mounting plate.

