

Project Contact Fill in the shaded boxes using the information listed below Order R-0010 -Code B 1 B 2 0 (E) (F) MODEL SIZE SUSPENSION **CANOPY COLOR** FINISH 1 -FINISH 2 -LAMPING LIGHT OPTION SIDE PANELS STRUCTURE CCT OUTPUT CODE EXAMPLE ORDER CODE С W L2 R-0010 30 085 30 XD120 001




Aliso 36", Cable Suspension - Frosted Polymer Side - Walnut Structure - 2700K

A SIZE

- **18** 18" Ø X 8" H
- **24** 24" Ø X 8" H
- **30** 30" Ø X 10" H
- **36** 36" Ø X 12" H
- **46** 46" Ø X 16" H

Custom sizes are available upon request.



B SUSPENSION & CANOPY

- 1 Type of Suspension
- **C** Cable Suspension
- **R** Rigid Stem

Standard drop length is 96" and is field cuttable. See section G for longer drop length option.

2 Color of Canopy

- **W** White
- **B** Black
- **R** Brushed Brass
- A Brushed Aluminum

© FINISH 1 - SIDE PANELS

Translucent Side Panels

051 Frosted Polymer

Opaque Side Panels

Matte Black with

Matte White Interior

012 Brushed Aluminum

047 Brushed Brass

096 Distressed Brass

046 Brushed Rose Gold

054 Gloss White

See page 3 for color swatches.

D FINISH 2 - STRUCTURE

Wood Structure

001 Walnut

002 Dark Stained Walnut

095 White Washed Oak

Metal Structure

119 Brushed Aluminum

120 Brushed Brass

049 Textured Black

060 Textured White

See page 3 for color swatches.

(E) LAMPING CCT

27 2700K LED

30 3000K LED

30 3000K LE

35 3500K LED

40 4000K LED

CRI 90+

(F) LIGHT OUTPUT

L1 Low Output

L2 Medium Output

L3 High Output

See page 2 for output specifications on size of fixture and dimming information

© OPTION CODE

For custom drop lengths add "XD" followed by desired Overall Height in inches at end of order code. Otherwise a standard 96" drop length is provided which is field cuttable.

EM Emergency Backup option.











Lumen Output / Wattage

Low Output: 1690 lm (source), 19.7 W. Available for 18 & 24 sizes only Medium Output: 3400 lm (source), 19.3 W. Available for all sizes High Output: 6000 lm (source), 36.4 W. Available for 30, 36, & 46 sizes only

Values above for 3000K CCT

Driver Specs

120-277VAC Input

0-10 V dimming down to 1% with dim to off

Max driver dimensions: 4.3" x 2.4" x 1.1"

Suspension Details

Cable Suspension:

 ${\bf 3}$ steel aircraft cables with SVT electrical cord

Cord color matches canopy except:

White cord used for Brushed Aluminum (A) finish

Black cord used for Brushed Brass (R) finish

Suitable for sloped ceilings up to 30 degrees

Field adjustable drop length 12" min - 96" max

For extended cable length, please specify using XD designator in the

SKU builder

Driver housed in canopy

Rigid Stem:


Stem and canopy finish to match

Rigid stem is field cuttable to shorten


Allows for 45° swivel


Driver must be housed remotely in suitable enclosure

Fixture Elevation



Relative Shape and Scale



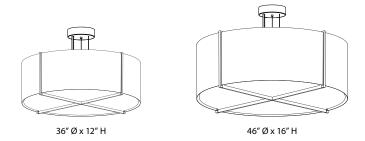





® FINISH 1 - SIDE PANELS

TRANSLUCENT



051 Frosted Polymer CM-051



085 Matte Black with Matte White (CM-121) Interior CM-085



012 Brushed Aluminum CM-012



OPAQUE

047 Brushed Brass CM-047



096 Distressed Brass CM-096



046 Brushed Rose Gold CM-046



054 Gloss White CM-054

© FINISH 2 - STRUCTURE


METAL



119 Brushed Aluminum CM-119



120 Brushed Brass CM-120



049 Textured Black CM-049



060 Textured White CM-060

WOOD



001 Walnut CM-001



002 Dark Stained Walnut CM-002



095 White Washed Oak CM-095