

Project  Contact

Fill in the shaded boxes using the information listed below

Order Code	R-0010	-		-		-		-		-		-		-			
	MODEL		(A)		(B) (1)		(B) (2)		(C)		(D)		(E)		(F)		(G)
	MODEL		SIZE		SUSPENSION		CANOPY COLOR		FINISH 1 - SIDE PANELS		FINISH 2 - STRUCTURE		LAMPING CCT		LIGHT OUTPUT		OPTION CODE
EXAMPLE ORDER CODE	R-0010	-	30		C		W	-	085	-	001	-	30		L2	-	XD120




Aliso 36", Cable Suspension - Frosted Polymer Side - Walnut Structure - 2700K

#### A SIZE

- 18** 18" Ø X 8" H
- 24** 24" Ø X 8" H
- 30** 30" Ø X 10" H
- 36** 36" Ø X 12" H
- 46** 46" Ø X 16" H

Custom sizes are available upon request.

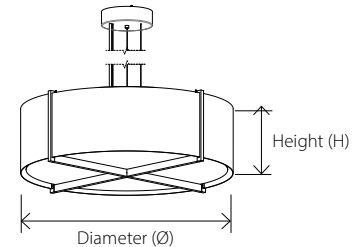

#### B SUSPENSION & CANOPY

##### 1 TYPE OF SUSPENSION

- C** Cable Suspension
- R** Rigid Stem

Standard drop length is 96" and is field cuttable. See section G for longer drop length option.

##### 2 COLOR OF CANOPY

- W** White
- B** Black
- R** Brushed Brass
- A** Brushed Aluminum

#### C FINISH 1 - SIDE PANELS

##### TRANSLUCENT SIDE PANELS

- 051** Frosted Polymer
- OPAQUE SIDE PANELS**
- 085** Matte Black with Matte White Interior
- 012** Brushed Aluminum
- 047** Brushed Brass
- 096** Distressed Brass
- 046** Brushed Rose Gold
- 054** Gloss White

See page 3 for color swatches.

#### D FINISH 2 - STRUCTURE

##### WOOD STRUCTURE

- 001** Walnut
- 002** Dark Stained Walnut
- 095** White Washed Oak
- METAL STRUCTURE**
- 119** Brushed Aluminum
- 120** Brushed Brass
- 049** Textured Black
- 060** Textured White

See page 3 for color swatches.

#### E LAMPING CCT

- 27** 2700K LED
- 30** 3000K LED
- 35** 3500K LED
- 40** 4000K LED

CRI 90+

#### F LIGHT OUTPUT

- L1** Low Output
- L2** Medium Output
- L3** High Output

See page 2 for output specifications on size of fixture and dimming information.

#### G OPTION CODE

- XD** For custom drop lengths add "XD" followed by desired Overall Height in inches at end of order code. Otherwise a standard 96" drop length is provided which is field cuttable.
- EM** Emergency Backup option.



## LUMEN OUTPUT / WATTAGE

Low Output: 1690 lm (source), 19.7 W. Available for 18 & 24 sizes only  
Medium Output: 3400 lm (source), 19.3 W. Available for all sizes  
High Output: 6000 lm (source), 36.4 W. Available for 30, 36, & 46 sizes only

Values above for 3000K CCT.

## DRIVER SPECS

120-277VAC Input  
0-10 V dimming down to 1% with dim to off  
Max driver dimensions: 4.3" x 2.4" x 1.1"

## SUSPENSION DETAILS



### CABLE SUSPENSION

3 steel aircraft cables with SVT electrical cord  
Cord color matches canopy except:  
White cord used for Brushed Aluminum (A) finish  
Black cord used for Brushed Brass (R) finish  
Suitable for sloped ceilings up to 30 degrees  
Field adjustable drop length 12" min - 96" max  
For extended cable length, please specify using XD designator in the SKU builder  
Driver housed in canopy


### RIGID STEM

Stem and canopy finish to match  
Rigid stem is field cuttable to shorten  
Allows for 45° swivel  
Driver must be housed remotely in suitable enclosure

## RELATIVE SHAPE AND SCALE

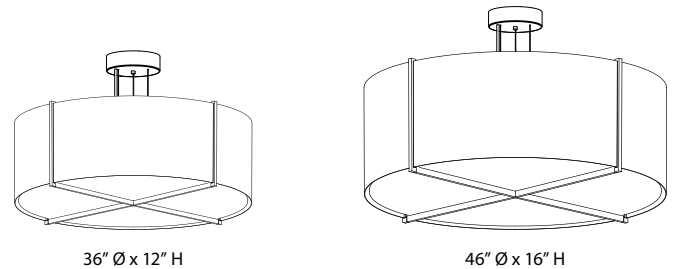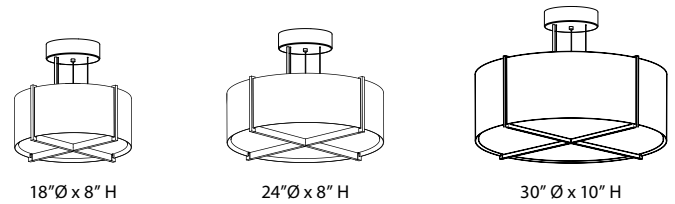


## FIXTURE ELEVATION

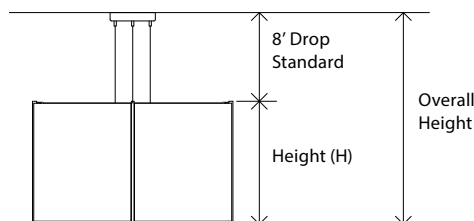


© FINISH 1 - SIDE PANELS

TRANSLUCENT



Frosted Polymer  
CM-051


OPAQUE



Matte Black w/ Matte White  
(CM-121) Interior  
CM-085



Brushed Aluminum  
CM-012




Brushed Brass  
CM-047



Distressed Brass  
CM-096



Brushed Rose Gold  
CM-046



Gloss White  
CM-054

© FINISH 2 - STRUCTURE


METAL




Brushed Aluminum  
CM-119



Brushed Brass  
CM-120




Textured Black  
CM-049



Textured White  
CM-060

WOOD



Walnut  
CM-001



Dark Stained Walnut  
CM-002



White Washed Oak  
CM-095