

Cerno Art Light with Ketra



The Cerno Art Light with Ketra combines Cerno's clean picture light designs with Ketra performance. The technology enables the light to follow the natural rhythm of daylight, warmly dim down, or dial up the vibrancy to transform a piece of art.

Order Code	03-305	-		-		-				-	
Example Order Code	MODEL		(A) WIDTH		(B) FINISH		(C) PROFILE		(D) MOUNTING		(E) LAMPING
	03-305	-	235	-	WT	-	L		S	-	KH1



Round Profile, Standard Mount, White

(A) WIDTH

	FIXTURE WIDTH	CANVAS WIDTH RANGE
115	11.5"	12"-18"
175	17.5"	18"-24"
235	23.5"	24"-36"
355	35.5"	36"-48"
475	47.5"	48"-60"
595	59.5"	60"-72"

(B) FINISH - STANDARD

- BL** Black (CM-030)
- BZ** Oil Rubbed Bronze (CM-029)
- GD** Gold (CM-031)
- WT** White (CM-060)
- AL** Brushed Aluminum (CM-006)



FINISH - PREMIUM

- BB** Brushed Brass (CM-120)
- SN** Satin Nickel (CM-124)
- DB** Distressed Brass (CM-117)

See page 2 for color swatches.
Material samples available upon request.

(C) PROFILE

- L** Low Profile*
- R** Round Profile



*Low profile fixtures mounted 7 ft or higher may expose the light source to viewers standing within 3 ft of the artwork.




Low Profile, Direct Wire Wall Mount, White

(D) MOUNTING

- S** Standard Mount
- D** Direct Wire Wall Mount


STANDARD MOUNT



The Standard Mount includes two slim 90° arms that slide into a mounting bracket. The mounting bracket can be installed on the back of the frame or directly to the wall behind the art.

The height of the fixture is adjustable within the mounting bracket.

DIRECT WIRE WALL MOUNT



The Direct Wire Wall Mount attaches to a J-box above an art piece. Junction box placement is critical.


(E) LAMPING

- KH1** One Ketra High Output LSO Lightbar
- KH2** Two Ketra High Output LSO Lightbars*


See Ketra LSO Light Bar Slim spec sheet for more information.

Ketra SKU: HW-LS0HO350BLNWW

LED modules are adjustable for aiming light on the canvas.

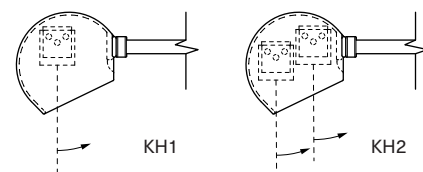


*KH2 is only available in Round Profile. KH2 fixtures mounted 7.5 ft or higher may expose the light source to viewers standing within 3 ft of the artwork.

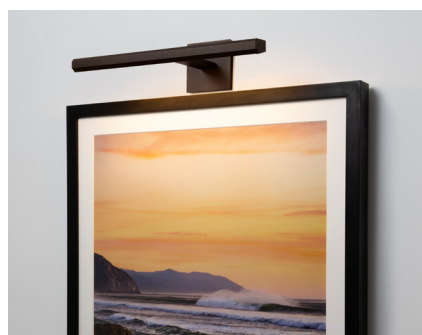


Low Profile, Direct Wire Wall Mount, Oil Rubbed Bronze




PROFILE AND MOUNTING CONFIGURATIONS

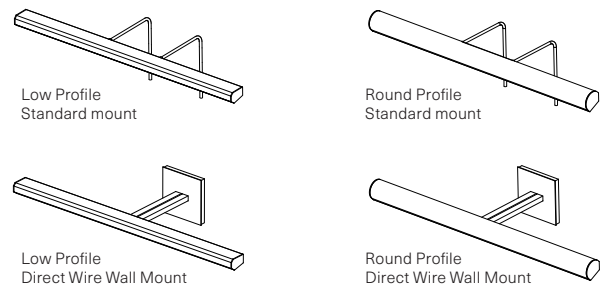

MOUNTING DETAILS

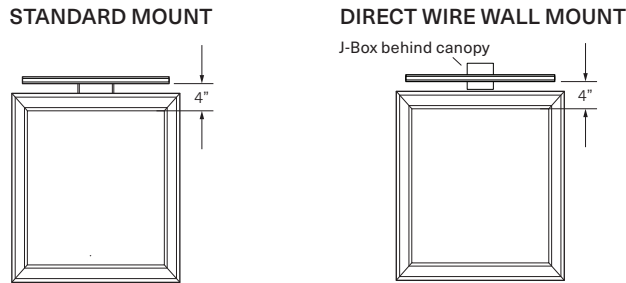


Standard Mount: The mounting bracket can be installed on the back of the frame or directly to the wall behind the art.

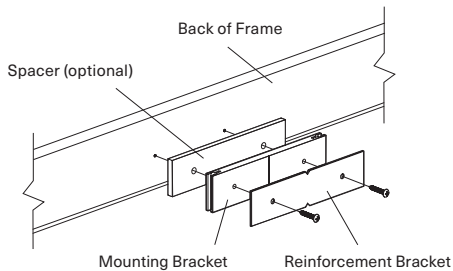


SIDE-BY-SIDE

If multiple fixtures are to be mounted side-by-side to illuminate a single canvas, a 3 inch maximum distance between fixtures is recommended.

Brackets to connect fixtures side-by-side are available upon request. Contact Cerno Customer Service for more details.




FINISH - STANDARD

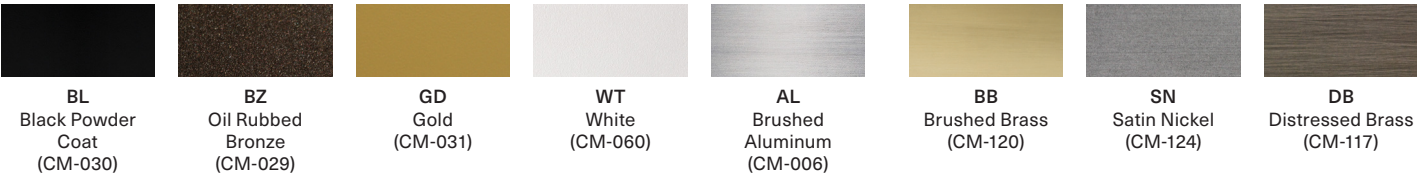

PRODUCT DIMENSIONS


STANDARD MOUNT

SKU OPTION	A	B	C
115	11.5"	8"	6"
175	17.5"	8"	6"
235	23.5"	8"	6"
355	35.5"	8"	12"
475	47.5"	8"	12"
595	59.5"	8"	12"




DIRECT WIRE WALL MOUNT

SKU OPTION	A	B	C
115	11.5"	9.25"	4.5"
175	17.5"	9.25"	4.5"
235	23.5"	9.25"	4.5"
355	35.5"	9.25"	4.5"
475	47.5"	9.25"	4.5"
595	59.5"	9.25"	4.5"



WIRING DETAILS

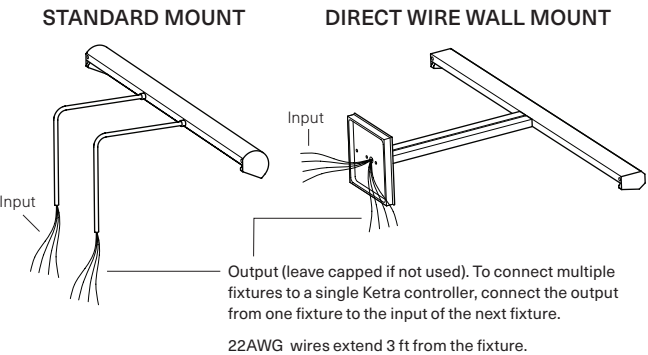

TECHNICAL SPECIFICATIONS

Controller & Power Supply not included.
See Ketra LSO High Output Light Bar Slim spec sheet for electrical and photometric information.
Ketra SKU: HW-LSOHO350BLNWW
Ketra light bar size is 1.5" shorter than fixture width.
Modules in the KH2 option are wired in series.

FINISH - PREMIUM

