

CERNO ART LIGHT

SALES@CERNOGROUP.COM 949.715.1534

Project:

Contact:

Fill in the shaded boxes using the information listed below

EXAMPLE ORDER CODE **03-300-12-AL-LS-27P1**

Order Code: **03-300** - **A** WIDTH - **B** FINISH - **C** PROFILE **D** MOUNTING - **E** LAMPING **F** DRIVER PACKAGE



24" width - Gold- Round Profile
Standard Mount - 2700K



18" width - White - Low Profile
Direct Wire Wall Mount - 3000K



18" width - Oil Rubbed Bronze - Low Profile
Standard Mount - 2700K

A WIDTH

	Fixture Width	Canvas Width Range
12	12"Width	0 - 26"
18	18"Width	20" - 34"
24	24"Width	26" - 42"
36	36"Width	38" - 53"
48	48"Width	50" - 64"

B FINISH

BL Black (CM-030)
BZ Oil Rubbed Bronze (CM-029)
GD Gold (CM-031)
WT White (CM-060)
AL Brushed Aluminum (CM-006)
BB Brushed Brass (CM-071)


See page 2 for color swatches.
Material samples available upon request.

C PROFILE

Cerno art light is available in 2 hood profiles.

L	Low Profile
R	Round Profile

Low profile



Round profile




D MOUNTING

Cerno art light is available in 2 mounting options.

S	Standard Mount
D	Direct Wire Wall Mount


Standard Mount

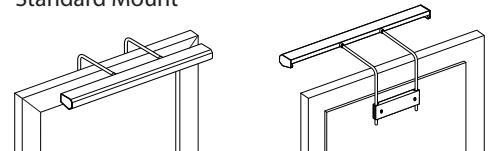

The Standard Mount includes two slim 90° arms that slide into a mounting bracket. The mounting bracket can be installed on the back of the frame or directly to the wall behind the art. Compatible with a plug-in power supply or can be hardwired to a power supply within a j-box.

Note: Plugin version is non-dimmable and must be plugged into a non-dimmed circuit.

Direct Wire Wall Mount



The Direct Wire Wall Mount attaches to a j-box above an art piece. External driver can be housed in the j-box or installed remotely.

E LAMPING CCT

27	2700K LED
30	3000K LED
35	3500K LED

CRI 90+
R9 values 85+

F DRIVER PACKAGE

SEE PAGE 2 FOR DRIVER SIZES

P0	No Driver*
PL	Plugin, 120-240V input, Non-dimmable**
P1	Hardwire, 120V input Triac/ELV/0-10V Dimmable
P2	Hardwire, 277V input Triac/ELV/0-10V Dimmable
P3	Hardwire, 120-277V input Non-dimmable**


* Fixture must be connected to 24 Volt DC constant voltage class 2 LED driver supplied by others.

** PL and P3 must be connected to a non-dimmed circuit.

- Drivers can be remotely mounted at 50' max distance.
- Multiple fixtures can be wired to single driver, not to exceed driver wattage.
- 0-10 V dimming = down to 1%
- ELV & Triac dimming = down to ~10%
- P3 is most cost effective hardwired option and is not available for the 48" width fixture.

Size	Source Lumens	Power Watts
12"Width	477	7W
18"Width	737	10.5W
24"Width	997	14W
36"Width	1517	21W
48"Width	2037	28W


Profile and Mounting Configurations

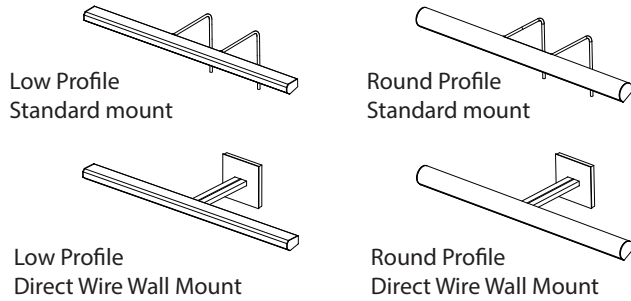

Product Dimensions

Standard mount

A	B	C
12"	8"	6"
18"	8"	6"
24"	8"	6"
36"	8"	12"
48"	8"	12"


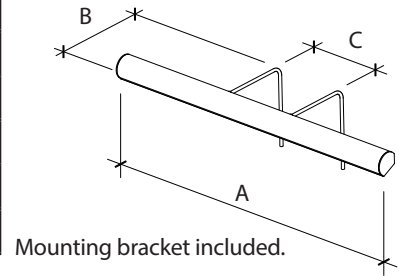


Driver Dimensions

Size	PL	P1	P2	P3
12"	3.9"x1.75"x1.25"	2.63"x1.25"x.81"	2.63"x1.25"x.81"	3"x1"x1.5"
18"	3.9"x1.75"x1.25"	2.63"x1.25"x.81"	2.63"x1.25"x.81"	3"x1"x1.5"
24"	3.9"x1.75"x1.25"	3"x1"x1.5"	3"x1"x1.5"	3"x1"x1.5"
36"	3.9"x1.75"x1.25"	3"x1"x1.5"	3"x1"x1.5"	3"x1"x1.5"
48"	4.44"x2"x1.25"	2.82"x2.5"x1.2"	2.82"x2.5"x1.2"	NA

Direct Wire Wall Mount

A	B	C
12"	9.25"	4.5"
18"	9.25"	4.5"
24"	9.25"	4.5"
36"	9.25"	4.5"
48"	9.25"	4.5"

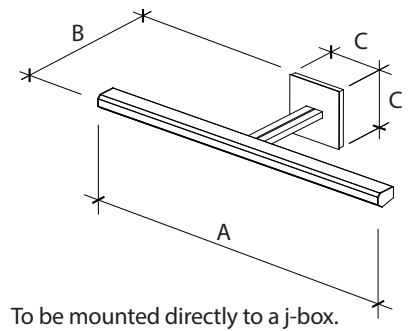

PL - Plug in power
Cord length = 9'




P1, P2, P3 - Hardwire drivers
must be housed in a suitable
enclosure.


Finish Swatches




BL
Black
powder coat
CM - 030



BZ
Oil Rubbed Bronze
powder coat
CM - 029



GD
Gold
powder coat
CM - 031



WT
White
powder coat
CM - 060



AL
Brushed Aluminum
CM - 006



BB
Brushed Brass
CM - 071

Installation Images



For multiple fixtures mounted end to end
an alignment bracket is available. (below)



Detail shot of diffusing lens.

