




Light and delicate, subtly unique while simple, the Camur must be experienced to really be appreciated. The gentle curve appears from the bottom just the same as it does from the side: but the perspectives found between the two intrigue.

When experiencing this fixture in person you begin to see the subtlety and grace of its vertical and horizontal movements. As you walk around this fixture the shape will morph from a beautiful curve to a straight line.

We have created a video to help celebrate these details at: cernogroup.com/products/camur/

Camur linear pendant

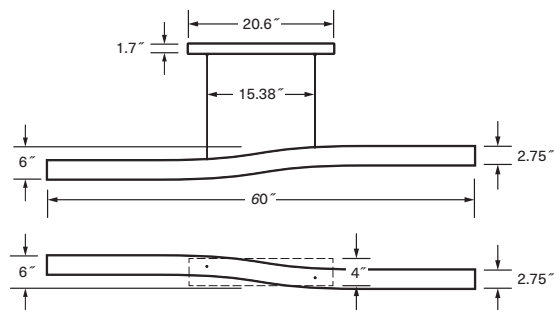

Dimensions: 60" x 6" x 6"

Materials: solid wood, polymer

Product weight: 6 lbs

Light source: integrated LED

Light output: 2500 Lumens (source)

Light color: 2700 K or 3500 K

Color accuracy: 90+ CRI

Power usage: 35 W

Dimmable (see driver below)

Brushed aluminum (CM-006) canopy included

Canopy dimensions: 20.6" x 4.6" x 1.7"

Wood canopy covers are available:

Walnut (CM-001) wood camur canopy cover: part # 60-150-005W


Dark stained walnut (CM-002) wood camur canopy cover: part # 60-150-005D

Black mesh sleeve low voltage cord suspension

6"-0" drop length, field adjustable

Suitable for a sloped ceiling

Wood grain will vary. Specifications subject to change

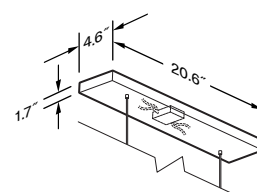

MATERIAL & FINISH OPTIONS

Wood Body

walnut

dark stained walnut

Lamping*

2700 K LED

3500 K LED




Driver

120 V AC input voltage


TRIAC, ELV & 0-10 V dimming

277 V AC input voltage

TRIAC, ELV & 0-10 V dimming

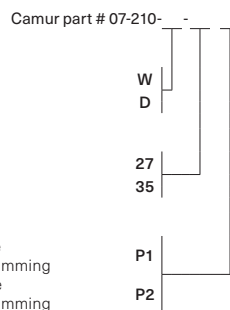

* Available in 3000K, 4000K and other color temperatures upon request.

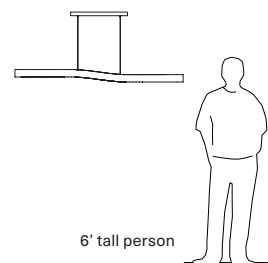

⚠ WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov