






PROJECT: CONTACT:

Fill in the shaded boxes using the information listed below.

ORDER CODE	R-0080	-		-		-		-		-		-			
	MODEL	(A)	FIXTURE LENGTH	(B)	SUSPENSION	(C)	WALL FINISH	(D)	CANOPY FINISH	(E)	LIGHT DIRECTION	(F)	LAMPING CCT	(G)	OPTION CODE
EXAMPLE ORDER CODE	R-0080	-	46	-	S	-	002	-	119	-	D	-	27	-	EM


(A) FIXTURE LENGTH

- 46** 46" x 2.3" x 4"H
- 70** 70" x 2.3" x 4"H
- 94** 94" x 2.3" x 4"H

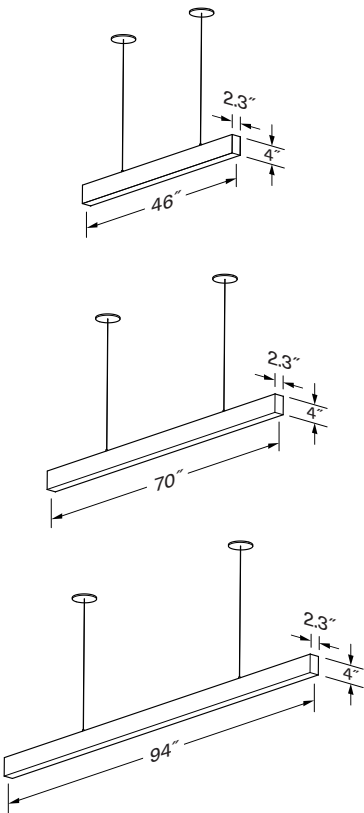

(B) SUSPENSION

- S** Split Canopy
- L** Linear Canopy

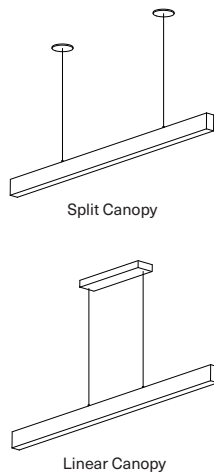


(C) WALL FINISH

- 001** Walnut
- 002** Dark Stained Walnut
- 095** White Washed Oak
- 012** Brushed Aluminum
- 046** Rose Gold
- 047** Brushed Brass
- 096** Distressed Brass
- 085** Matte Black

Walnut and Oak fixtures are constructed of real solid wood with a natural oil finish.

(D) CANOPY FINISH

- 119** Brushed Aluminum
- 120** Brushed Brass
- 117** Distressed Brass
- 049** Textured Black
- 060** Textured White

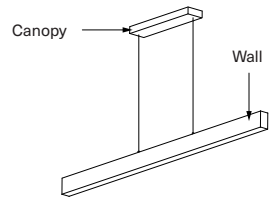

(E) LIGHT DIRECTION

- D** Direct
 - B** Direct and Indirect
- CRI 90+

(F) LAMPING CCT

- 27** 2700K LED
- 30** 3000K LED
- 35** 3500K LED
- 40** 4000K LED

- WD** Warm Dim
- TW** Tunable White

(G) OPTION CODE

- For custom drop lengths add "XD" followed by desired Overall Height in inches at end of order code. Otherwise a standard 96" drop length is provided which is field cuttable.
- XD**
- EM** Emergency Backup option



Specification subject to change without notice. The information contained in this drawing is the sole property of Cerno, LLC. Any reproduction in part or in whole without the written permission of Cerno, LLC is prohibited.

SUSPENSION


Split Canopy: 5" Ø x .29" H

Suspension Cable Distance:

- 46: 24"
- 70: 36"
- 94: 48"

Linear Canopy: 20.6" x 4.6" x 0.3"H

Suspension Cable Distance: 19.13"

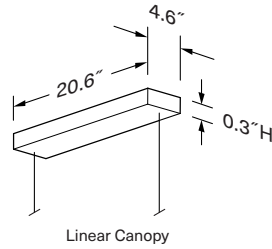




1/16" Stainless Steel Cables (CM-053)

Field adjustable drop length: 1'0" min - 8'0" max

Suitable for a sloped ceiling

For extended cable length, please specify using XD designator in SKU builder

Clear SPT-1 Cable for power

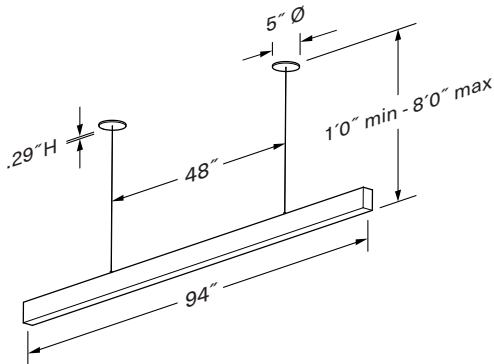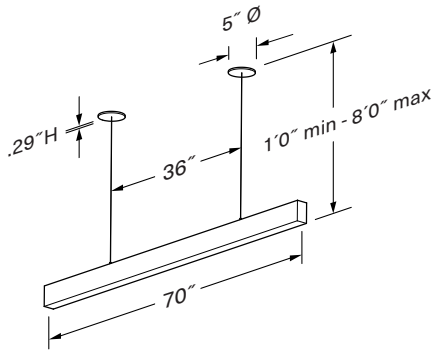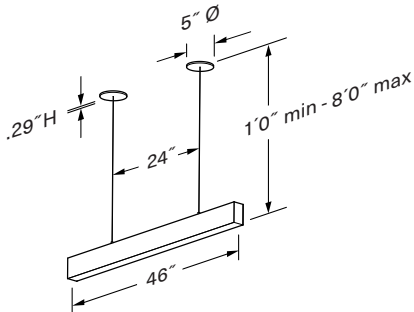

FIXTURE SPECS

LENGTH	DIMENSIONS	WEIGHT
46"	46" x 2.3" x 4" H	7 lbs
70"	70" x 2.3" x 4" H	10 lbs
94"	94" x 2.3" x 4" H	13 lbs

Light source: integrated LED

Color accuracy: 90+ CRI

See table (right) for light output

LIGHT OUTPUT / WATTAGE

DIRECT LIGHT OUTPUT

LENGTH	WATTS	DELIVERED LUMENS (DOWN)
46"	30	2287
70"	48	3554
94"	63	4702

DIRECT AND INDIRECT LIGHT

LENGTH	WATTS	DELIVERED LUMENS (DOWN)	DELIVERED LUMENS (UP)
46"	45	2287	1119
70"	71	3554	1739
94"	94	4702	2301

DRIVER SPECS


AC Input Voltage Range: 120-277 V

0-10V dimming down to 1% with dim to off


Drivers to be mounted remote at a maximum distance of 50' including pendant drop distance, provided a 12 gauge wire is used.

Driver dimensions are maximum 6.25" x 3" x 1.06"

PHOTOMETRIC POLAR GRAPH

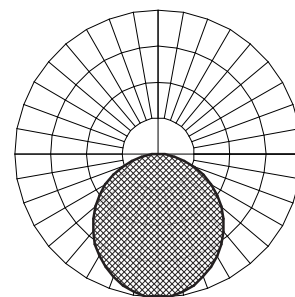

Direct



Direct and Indirect

Specification subject to change without notice. The information contained in this drawing is the sole property of Cerno, LLC. Any reproduction in part or in whole without the written permission of Cerno, LLC is prohibited.

© WALL FINISH



Walnut
CM-001



Dark Stained Walnut
CM-002




White Washed Oak
CM-095



Brushed Aluminum
CM-012




Rose Gold
CM-046




Brushed Brass
CM-047



Distressed Brass
CM-096




Matte Black
CM-085



Matte White
CM-121

ⓓ CANOPY FINISH




Brushed Aluminum
CM-119




Brushed Brass
CM-120



Distressed Brass
CM-117



Textured Black
Powder Coat
CM-049



Textured White
Powder Coat
CM-060