

Project:

Contact:

Fill in the shaded boxes using the information listed below

Order Code **R-0030** - - - - - - - -

Model (A) DIAMETER (B) SUSPENSION (C) FINISH 1 - RING WALL (D) FINISH 2 - SEAM PLATE (E) LIGHT DIRECTION (F) LAMPING CCT (G) OPTION CODE

EXAMPLE ORDER CODE R-0030 - 4 - S - 002 - 008 - D - 27 - EM




Gaviota, 6' diameter, Angled cables, walnut ring walls, distressed brass seam plate, direct light, 3000K.




Detail of Distressed Brass seam plate with Walnut ring walls

(A) DIAMETER

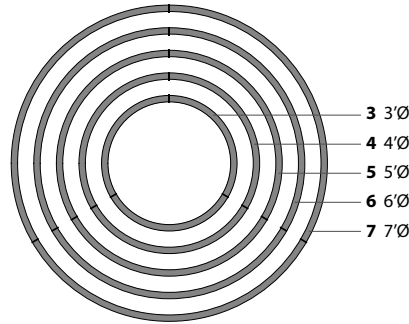


(B) SUSPENSION


S Straight



A Angled



C Collared




(C) FINISH 1 - RING WALL

- 001 Walnut
- 002 Dark Stained Walnut
- 095 White Washed Oak
- 012 Brushed Aluminum
- 046 Rose Gold
- 047 Brushed Brass
- 096 Distressed Brass
- 085 Matte Black
- 121 Matte White

(D) FINISH 2 - SEAM PLATE

- 119 Brushed Aluminum
- 120 Brushed Brass
- 117 Distressed Brass
- 049 Textured Black
- 060 Textured White

Canopy finish will match seam plate finish.

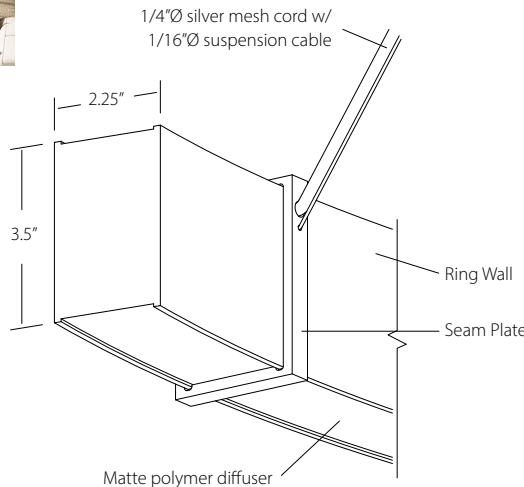

All Gaviota pendants have 3 seam plates and suspension cables, number of electrical cords per model listed on page 2.

(E) LIGHT DIRECTION

- D Direct
- B Direct and Indirect

(F) LAMPING CCT

- 27 2700K LED
- 30 3000K LED
- 35 3500K LED
- 40 4000K LED
- CRI 90+

(G) OPTION CODE

- XD** For custom drop lengths add "XD" followed by desired Overall Height in inches at end of order code. Otherwise a standard 96" drop length is provided which is field cuttable.
- EM** Emergency Backup option.

Walnut and Oak fixtures are constructed of real solid wood with a natural oil finish.



Lumen Output / Wattage / Weight

Direct Light

DIAMETER	WATTS	DELIVERED LUMENS (DOWN)	NUMBER OF DRIVERS	WEIGHT (LBS)	NUMBER OF ELECTRICAL CORDS
3'	74	6160	1	21	1
4'	100	8260	2	26	2
5'	124	10350	2	30	2
6'	151	12685	2	33	2
7'	177	14935	2	38	2

Direct and Indirect Light

DIAMETER	WATTS	DELIVERED LUMENS (DOWN)	DELIVERED LUMENS (UP)	NUMBER OF DRIVERS	WEIGHT (LBS)	NUMBER OF ELECTRICAL CORDS
3'	110	6160	3165	2	21	2
4'	148	8260	4240	3	26	3
5'	183	10350	5320	3	30	3
6'	224	12685	6515	3	33	3
7'	263	14935	7670	3	38	3

Driver Specs

120-277VAC Input

0-10V dimming down to 1% with dim to off


Drivers to be mounted remote at a maximum distance of 50' including pendant drop distance, provided a 12 gauge wire is used.

Driver dimension are maximum 6.25" x 3" x 1.06".

Canopy, Suspension Cables and Electrical Cords


- The Gaviota is built in 3 sections and is assembled on site (except for 3' diameter).
- 1/16" aircraft cable with cable grip suspension hardware included.
- 96" drop provided for a suspension types - add XD in order code for longer drops.
- 24" minimum drop for angled cable suspensions.
- Angled suspension cable angles not to be less than 30 degrees from horizontal.
- Canopies match seam plate material finish.

Photometric Polar Graph

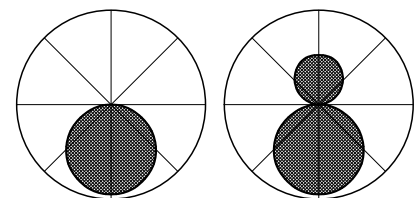


Direct


Direct and Indirect



Straight Suspension
Canopy 5" Ø X .29"H

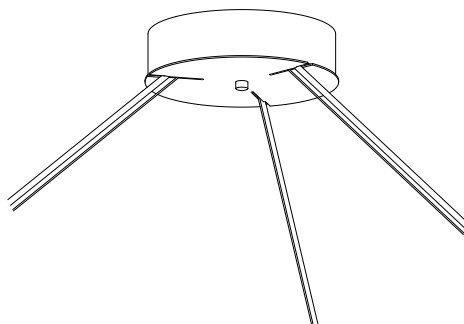

Angled Suspension
Canopy 8" Ø X 2"H

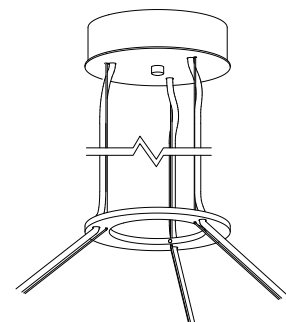

Collared Suspension
Canopy 8" Ø X 1.7"H
Collar 6" Ø X .25"H

© FINISH 1 - RING WALL



001
Walnut
(CM-001)



002
Dark Stained Walnut
(CM-002)




095
White Washed Oak
(CM-095)



012
Brushed Aluminum
(CM-012)




046
Rose Gold
(CM-046)




047
Brushed Brass
(CM-047)



096
Distressed Brass
(CM-096)



085
Matte Black
(CM-085)




121
Matte White
(CM-121)


© FINISH 2 - SEAM PLATE




119
Brushed Aluminum
(CM-119)




120
Brushed Brass
(CM-120)



117
Distressed Brass
(CM-117)



049
Textured Black
Powder Coat
(CM-049)



060
Textured White
Powder Coat
(CM-060)