

cerno®



Grata Sconce

DESIGNED AND MADE IN CALIFORNIA



Walnut, brushed brass



White oak, distressed brass



White washed oak, brushed brass.
Shown with included 5" white canopy.*




Dark stained walnut, distressed brass

The Grata Sconce's fresh design is inspired by nature's mastery of creating forms that appear delicate yet are strong and resilient. The shape and profile of the curved wood create a silhouette that feels organic, almost plant-like. The floating, thin brass lighting element references the shape of the wood but adds a sculptural moment through its contrast of scale and material.

*Preferred Installation: Mounts directly to a standard single-gang junction box for a clean, low-profile appearance. See driver dimensions on following page.

Alternative J-box Compatibility: Also mounts to a 4" octagonal or 4" square junction box with a round plaster ring, which requires the use of the included 5" round white canopy.

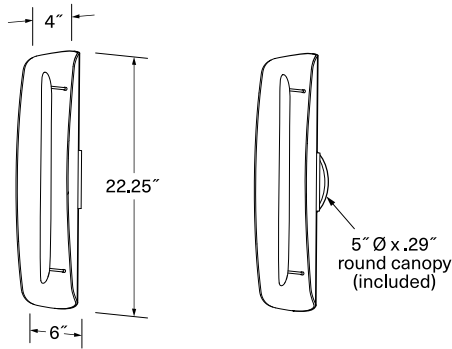

Preferred Installation* Alternative J-box Compatibility*

Dimensions: 22.25" x 6" x 4"
Materials: wood, brass
Product weight: 3 lbs
Light source: integrated LED
Light output: 1010 lm (source)*
Light color: 2700 K, 3000 K, 3500 K, or 4000 K
Color accuracy: 90+ CRI
Power usage: 8.5 W
Dimmable: See driver specs below
Wood grain will vary.
Specifications subject to change.



MATERIAL AND FINISH OPTIONS

Grata sconce part # 03-350-

Wood Body

walnut (CM-055)
dark stained walnut (CM-056)
white oak (CM-145)
white washed oak (CM-146)

Metal Accents

brushed brass (CM-008)
distressed brass (CM-009)


Lamping

2700 K LED
3000 K LED
3500 K LED
4000 K LED

Driver

AC Input Voltage Range: 120-277 V, 120 V input: TRIAC, ELV & 0-10 V dimmable. 240 & 277 V input: only 0-10 V dimmable

Wood Body



walnut



dark stained walnut



white oak



white washed oak

Metal Accents





brushed brass



distressed brass

†Due to indirect light source, delivered lumens is significantly affected by wood finish.



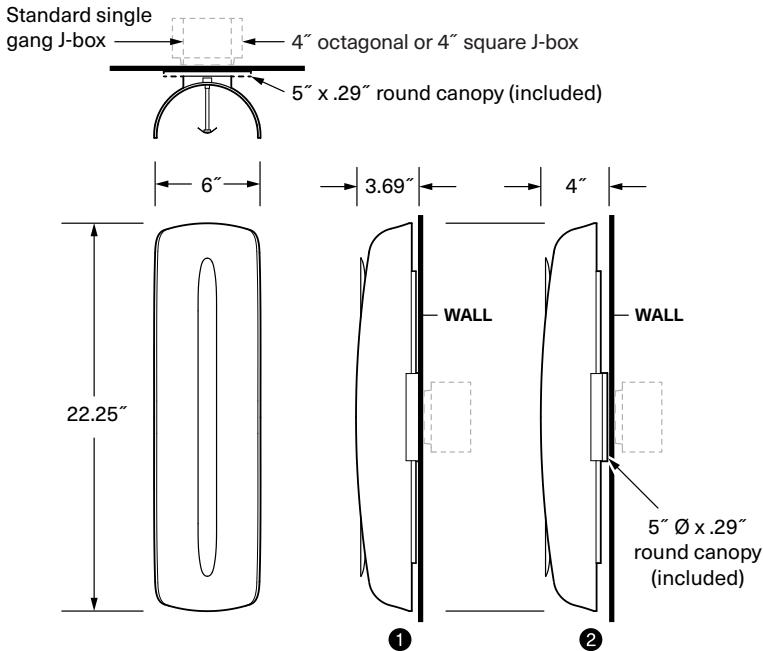

TECHNICAL SPECIFICATIONS

Dimensions: 22.25" x 6" x 4"

Materials: wood, brass

Product weight: 3 lbs

Light source: integrated LED

Light output: 1010 lm (source)*

Light color: 2700 K, 3000 K, 3500 K, or 4000 K

Color accuracy: 90+ CRI

Input Voltage: 120-277 V AC

Power usage: 8.5 W

Dimmable (see driver specs)

Driver location: must be housed in J-box or remotely

Driver dimensions: 3.30" x 1.57" x 0.99"

Included round canopy dimensions: 5" Ø x .29"

Wood grain will vary

Specifications subject to change



*Due to indirect light source, delivered lumens is significantly affected by wood finish.


1 Preferred Installation

Mounts directly to a standard single-gang junction box for a clean, low-profile appearance. See driver dimensions below.

2 Alternative J-box Compatibility

Also mounts to a 4" octagonal or 4" square junction box with a round plaster ring, which requires the use of the included 5" round white canopy.

PHOTOMETRIC POLAR GRAPH



Maximum Candela = 22.71
Located at Horizontal Angle = 45,
Vertical Angle = 90



Walnut (CM-055)
Distressed brass (CM-009)




Walnut (CM-055)
Brushed brass (CM-008)




White washed oak (CM-146)
Distressed brass (CM-009)



White washed oak (CM-146)
Brushed brass (CM-008)



Dark stained walnut (CM-056)
Distressed brass (CM-009)



Dark stained walnut (CM-056)
Brushed brass (CM-008)



White oak (CM-145)
Distressed brass (CM-009)



White oak (CM-145)
Brushed brass (CM-008)