




# DESIGNED AND MADE IN CALIFORNIA

Lex Linear Pendant


# $C \in \cap \cap O^{\circ}$

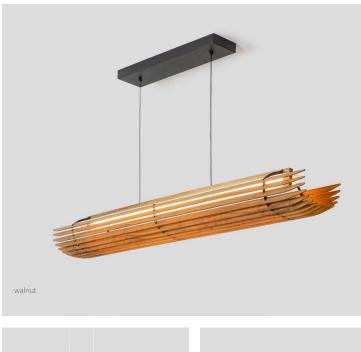



The Lex Linear Pendant embodies our love and respect for the ocean and the crafts that sail on her waters. It shares many elements of a well-made vessel. The three bulkheads capture and guide the fifteen slats, creating a dynamic and robust structure. As you walk around the Lex, the massing changes with each step and new perspective. The indirect light source delivers a beautiful quality and meaningful amount of light while also eliminating an opportunity for glare.

### Lex linear pendant




Dimensions: 56" x 9" , 7.25" H Product weight: 8 lb Light source: integrated LED Light output: 1845 Lumens (source) Light color: 2700 K, 3000 K, 3500 K, or 4000 K Color accuracy: 90+ CRI Power usage: 17 W Dimmable (see driver section below) Wood grain will vary Specifications subject to change




#### **MATERIAL & FINISH OPTIONS**

Lex linear pendant part # 07-240-Standard Finish Combinations walnut (CM-001) / black (CM049) WB dark stained walnut (CM-002) / DB black (CM-049) white washed oak (CM-095) / white (CM-060) ow Lamping 2700 K LED 27 3000 K LED 30 3500 K LED 35 4000 K LED 40 Driver 120-277 V AC input voltage P1 TRIAC, ELV & 0-10 dimming



▲ WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

# **SPECIFICATION SHEET**

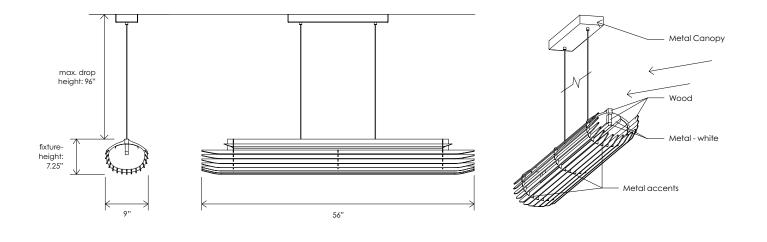


## TECHNICAL SPECIFICATIONS

Materials: solid wood, aluminum, steel Light source: integrated LED Light output: 1845 Lumens (source) Light color: 2700 K, 3000 K, 3500 K, or 4000 K Color accuracy: 90+ CRI Input Voltage: 120-277 V AC Power usage: 25 W Dimmablility: TRIAC, ELV & 0-10 V dimming Canopy dimensions: 20.5" x 4.4", 1.7" Drop length field adjustable: 0'-10" min, 8'-0" max Wood canopy covers are available: Walnut (CM-001) cover: part # 60-241-001W Dark Stained Walnut (CM-002) cover: part # 60-241-001D White Washed Oak (CM-095) cover: part # 60-241-0010 Suitable for a sloped ceiling up to 45 degrees Driver to be housed in canopy Driver dimensions: 3.6" Ø, 1.3" h, included Specifications subject to change



## PHOTOMETRIC POLAR GRAPH



Maximum Candela = 233.61 Located at Horizontal Angle = 75, Vertical Angle = 2.5

Output specifications shown for 2700K CCT and walnut shade with black accents for vertical plane through 0-180 degree horizontal angles. Other CCTs and material finishes may cause output specifications to vary.

### FINISHES








white washed oak (CM-095)

textured black (CM-049)



textured white (CM-060)

▲ WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov