

cerno®



DESIGNED AND MADE IN CALIFORNIA

Lex 19 & 28 Pendants



white washed oak




walnut



dark stained walnut

Lex in Latin is defined as Law, Principle, or Condition. Simple architectural principles guided the design and construction of the Lex pendant. Three primary parts, the light, the hubs, and the wood slats, compose the form, function, and feel. The laws of attraction are often mysterious, and Lex's ability to appear both solid and porous simultaneously creates a sense of intrigue and freshness.

Lex 19 pendant

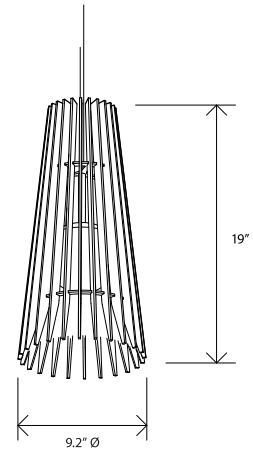

Dimensions: 9.2"Ø, 19" H
Product weight: 3.5 lb

Integrated LED Specifications

Light output: 915 Lumens (source), based on 2700 K
Light color: 2700 K, 3000 K, 3500 K, or 4000 K
Color accuracy: 90+ CRI
Power usage: 9 W
Dimmable (see power options below)

Candelabra E12 Specifications

Lamping: E12 candelabra, 60 W max, G16.5 frosted lamp recommended
Bulb not included
Input voltage: 125 V AC max

Wood grain will vary
Specifications subject to change



MATERIAL & FINISH OPTIONS

Lex 19 pendant part # 06-350-

Standard Finish Combinations



walnut (CM-001) / black (CM049)
dark stained walnut (CM-002) / black (CM-049)
white washed oak (CM-095) / white (CM-060)


Lamping

2700 K LED
3000 K LED
3500 K LED
4000 K LED
candelabra E12 socket

Driver (LED version only)

120-277 V AC input voltage
TRIAC, ELV & 0-10 dimming



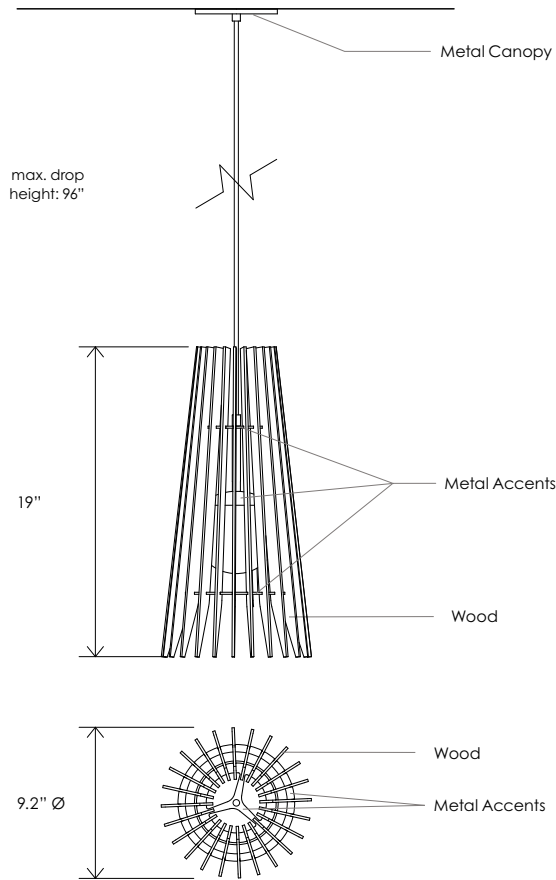

TECHNICAL SPECIFICATIONS

Dimensions: 9.2" Ø, 19" H
 Product weight: 3.5 lb

Integrated LED Specifications

Light output: 915 Lumens (source), based on 2700 K
 Light color: 2700 K, 3000 K, 3500 K, or 4000 K
 Color accuracy: 90+ CRI
 Input Voltage: 120-277 V AC
 Power usage: 9W
 Dimmability: TRIAC, ELV & 0-10 V dimming
 Driver to be housed in j-box or remote
 Driver dimensions: 3.3" x 1.6" x 1.0", included


Candelabra E12 Specifications

Lamping: E12 candelabra, 60 W max, G16.5 frosted lamp recommended
 Bulb not included
 Input voltage: 125 V AC max

Canopy dimensions: 5" Ø x .4"
 Drop length field adjustable: 0'-14" min, 8'-0" max
 Suitable for a sloped ceiling up to 45 degrees
 Specifications subject to change



PHOTOMETRIC POLAR GRAPH

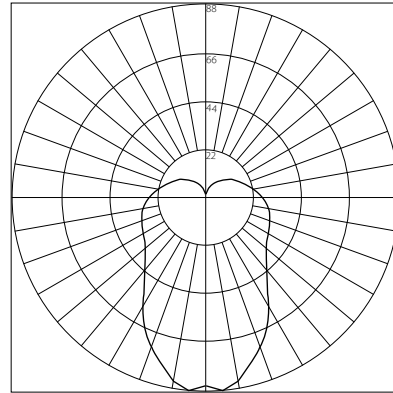


Maximum Candela = 88.27
 Located at Horizontal Angle = 0, Vertical Angle = 5

Output specifications shown for 2700K CCT and walnut shade with black accents for vertical plane through 0-180 degree horizontal angles. Other CCTs and material finishes may cause output specifications to vary.

FINISHES



walnut (CM-001)




dark stained walnut (CM-002)



white washed oak (CM-095)



textured black (CM-049)



textured white (CM-060)

▲WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov