

DESIGNED AND MADE IN CALIFORNIA

Lex 19 & 28 Pendants








Lex in Latin is defined as Law, Principle, or Condition. Simple architectural principles guided the design and construction of the Lex pendant. Three primary parts, the light, the hubs, and the wood slats, compose the form, function, and feel. The laws of attraction are often mysterious, and Lex's ability to appear both solid and porous simultaneously creates a sense of intrigue and freshness.

Lex 19 pendant



Dimensions: 9.2"Ø, 19" H Product weight: 3.5 lb

Integrated LED Specifications

Light output: 915 Lumens (source), based on 2700 K Light color: 2700 K, 3000 K, 3500 K, or 4000 K Color accuracy: 90+ CRI Power usage: 9 W Dimmable (see power options below)

Candelabra E12 Specifications

Lamping: E12 candelabra, 60 W max, G16.5 frosted lamp recommended Bulb not included Input voltage: 125 V AC max

Wood grain will vary Specifications subject to change




MATERIAL & FINISH OPTIONS

Lex 19 pendant part # 06-350-


Standard Finish Combinations walnut (CM-001) / black (CM049) WB dark stained walnut (CM-002) / black (CM-049) DB white washed oak (CM-095) / ow white (CM-060) Lamping 2700 K LED 27 3000 K LED 30 3500 K LED 35 4000 K LED 40 candelabra E12 socket CB Driver (LED version only) 120-277 V AC input voltage


TRIAC, ELV & 0-10 dimming



SPECIFICATION SHEET



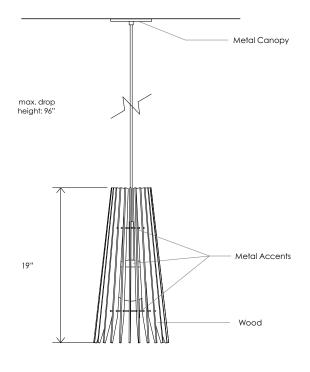



TECHNICAL SPECIFICATIONS

Dimensions: 9.2" Ø, 19" H Product weight: 3.5 lb

Integrated LED Specifications

Light output: 915 Lumens (source), based on 2700 K Light color: 2700 K, 3000 K, 3500 K, or 4000 K

Color accuracy: 90+ CRI Input Voltage: 120-277 V AC

Power usage: 9W

Dimmablility: TRIAC, ELV & 0-10 V dimming Driver to be housed in j-box or remote Driver dimensions: 3.3" x 1.6" x 1.0", included

Candelabra E12 Specifications

Lamping: E12 candelabra, 60 W max, G16.5 frosted lamp recommended

Bulb not included


Input voltage: 125 V AC max Canopy dimensions: 5" Ø x .4"

Drop length field adjustable: 0'-14" min, 8'-0" max Suitable for a sloped ceiling up to 45 degrees

Specifications subject to change



PHOTOMETRIC POLAR GRAPH



Maximum Candela = 88.27 Located at Horizontal Angle = 0, Vertical Angle = 5

Output specifications shown for 2700K CCT and walnut shade with black accents for vertical plane through 0-180 degree horizontal angles. Other CCTs and material finishes may cause output specifications to vary.

FINISHES













dark stained walnut (CM-002) white washed oak (CM-095)

textured black (CM-049)

▲ WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov