

Project

Contact

Fill in the shaded boxes using the information listed below




Order Code	R-0070	-		-		-		-		-		-			
	MODEL		A SUSPENSION		B EXTERIOR SHADE FINISH		C INTERIOR SHADE FINISH		D LIGHT ENGINE DISC		E LAMPING CCT		F LIGHT OUTPUT		G OPTION CODE
EXAMPLE ORDER CODE	R-0070	-	R		049	-	060	-	001	-	30	-	F	-	EM



Loma pendant, corded, textured white outside, textured white inside, white washed oak light engine disc, 2700 K.



Loma pendant, corded, textured black outside, distressed brass inside, dark stained walnut light engine disc, 2700 K.

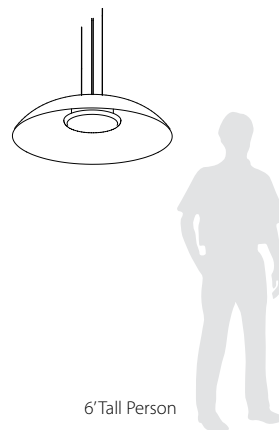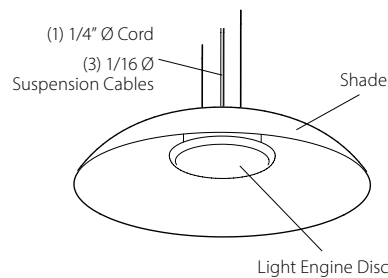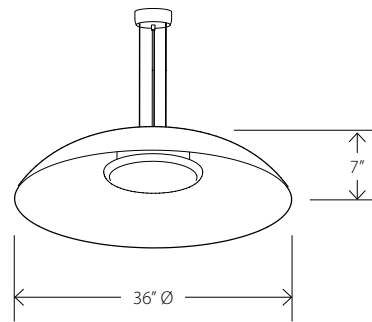

A SUSPENSION

W Corded White

B Corded Black

Canopy color will match cord color.

R Rigid Stem

Rigid stem and canopy matches finish of shade exterior.

B EXTERIOR SHADE FINISH

049 Textured Black

060 Textured White

119 Brushed Aluminum

120 Brushed Brass

117 Distressed Brass

C INTERIOR SHADE FINISH

060 Textured White

119 Brushed Aluminum

120 Brushed Brass

117 Distressed Brass

*Different finishes may reduce deliver lumens.

D LIGHT ENGINE DISC

001 Walnut

002 Dark Stained Walnut

095 White Washed Oak

049 Textured Black

060 Textured White

119 Brushed Aluminum

120 Brushed Brass

117 Distressed Brass

E LAMPING CCT

27 2700K LED

30 3000K LED

35 3500K LED

40 4000K LED

CRI 90+

F LIGHT OUTPUT

F Full Output - Wattage

R 50% Reduced Output - Wattage

C Custom Reduction Percentage

Full output: 2481 Lumens (delivered)
36 Watts

Full output based on
Textured White shade
interior and 2700 K LED.

Custom Reduction
Percentage - to reduce
both lumens and
wattage.

G OPTION CODE

XD For custom drop lengths add "XD" followed by desired *Overall Height* in inches at end of order code. Otherwise a standard 72" drop length is provided which is field cuttable.

EM Emergency Backup option.



FIXTURE SPECS

Dimensions: 36" dia, 7"

Materials: Spun Aluminum Shade, Solid Wood or Spun Metal Accent, Protective Powder Coated Finishes

Product weight: 19 lb

Light source: integrated LED

Light output: 2481 Lumens (delivered)

Color accuracy: 90+ CRI


DRIVER SPECS

AC Input Voltage Range: 120-277 V

0-10V dimming down to 1% with dim to off


LED driver integrated into fixture

SUSPENSION



Corded Suspension
Canopy 5" Ø X 2"H


- Textured White (CM-060) or Textured Black (CM-049)
- 3x 1/16" Stainless Steel Cables (CM-053)
- Field adjustable drop length: 1'0" min - 8'0" max
- Suitable for a sloped ceiling
- For extended cable length, please specify using XD designator in SKU builder
- 5-Conductor SVT Cable - color to match canopy (3 wires for AC power & ground, 2 wires for 0-10V dimming control)



Rigid Suspension
Canopy 5" Ø X 0.3"H

- Stem and canopy finish to match exterior shade finish
- 0.5" Ø rigid stem
- Field cuttable: 1'0" min - 8'0" max
- For extended stem length, please specify using XD designator in SKU builder
- White 5-Conductor SVT Cable inside rigid stem (3 wires for AC power & ground, 2 wire for 0-10V dimming control)

PHOTOMETRIC POLAR GRAPH




Maximum Candela = 809

Located at:


Horizontal Angle = 140

Vertical Angle = 20

Ⓑ EXTERIOR SHADE FINISH



Textured Black Powder Coat
CM-049



Textured White Powder Coat
CM-060



Brushed Aluminum
CM-119



Brushed Brass
CM-120



Distressed Brass
CM-117

Ⓒ INTERIOR SHADE FINISH



Textured White Powder Coat
CM-060



Brushed Aluminum
CM-119




Brushed Brass
CM-120




Distressed Brass
CM-117

Ⓓ LIGHT ENGINE DISC FINISH




Walnut
CM-001



Dark Stained Walnut
CM-002



White Washed Oak
CM-095




Textured Black Powder Coat
CM-049



Textured White Powder Coat
CM-060



Brushed Aluminum
CM-119



Brushed Brass
CM-120



Distressed Brass
CM-117