




*Merus is a quintessential Cerno design. Clean, modern lines paired with a novel indirect light source compose a form that balances beauty and usefulness. Our team used Cerno's signature material palette of wood and metal.*



## Merus vanity sconce

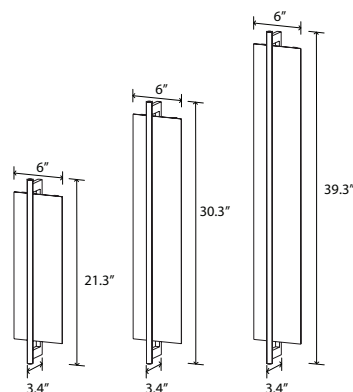

Merus 22 dimensions: 21.3" x 6" x 3.4"  
 Merus 31 dimensions: 30.3" x 6" x 3.4"  
 Merus 40 dimensions: 39.3" x 6" x 3.4"  
 Merus 22 weight: 2 lb  
 Merus 31 weight: 2 lb  
 Merus 40 weight: 3 lb  
 Light source: integrated LED  
 Merus 22 light output: 780 Lumens (source)  
 Merus 31 light output: 1170 Lumens (source)  
 Merus 40 light output: 1560 Lumens (source)  
 Light color: 2700 K, 3000 K, 3500 K or 4000 K  
 Color accuracy: 90+ CRI  
 Merus 22 power usage: 11 W  
 Merus 31 power usage: 16 W  
 Merus 40 power usage: 21 W  
 Dimmable (see driver below)  
 Driver location: must be housed in J-box  
 Merus 22 driver dimensions: 2.63" x 1.25" x 0.8", included  
 Merus 31 driver dimensions: 3.0" x 1.0" x 1.5", included  
 Merus 40 driver dimensions: 2.82" x 2.5" x 1.2", included  
 Wood grain will vary  
 Specifications subject to change



### MATERIAL & FINISH OPTIONS

| Size                         | Merus part #: 03-251- | B | - |
|------------------------------|-----------------------|---|---|
| 22"                          | 22                    |   |   |
| 31"                          | 31                    |   |   |
| 40"                          | 40                    |   |   |
| <b>Wood Finish</b>           |                       |   |   |
| walnut (CM-001)              | W                     |   |   |
| dark stained walnut (CM-002) | D                     |   |   |
| white washed oak (CM-095)    | O                     |   |   |
| <b>Metal Finish</b>          |                       |   |   |
| brushed aluminum (CM-006)    | A                     |   |   |
| brushed brass (CM-120)       | R                     |   |   |
| <b>Lamping</b>               |                       |   |   |
| 2700 K LED                   | 27                    |   |   |
| 3000 K LED                   | 30                    |   |   |
| 3500 K LED                   | 35                    |   |   |
| 4000 K LED                   | 40                    |   |   |
| <b>Driver</b>                |                       |   |   |
| 120 V AC input voltage       | P1                    |   |   |
| TRIAC, ELV & 0-10 V dimming  |                       |   |   |
| 277 V AC input voltage       | P2                    |   |   |
| TRIAC, ELV & 0-10 V dimming  |                       |   |   |

**Includes:** textured white (CM-060) reflector

