

## General Product Information


This product is suitable for indoor dry and damp locations only

**Junction Box Requirements:** This fixture can be mounted to most standard junction boxes. It is the installer's responsibility to ensure that the site conditions, junction box, and fasteners used are suitable to support the weight of the fixture.


Damage due to incorrect connections can be detected at the factory and is not covered under warranty.

### CAUTION - RISK OF FIRE


This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **TURN POWER OFF TO THE JUNCTION BOX**

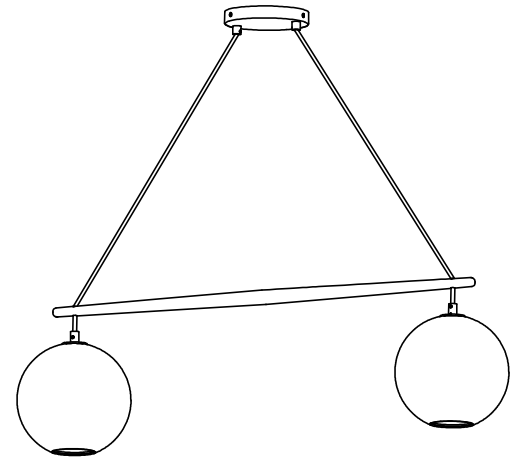


- ① Lay the fixture out on a flat horizontal surface and group the cords together at the desired drop length.

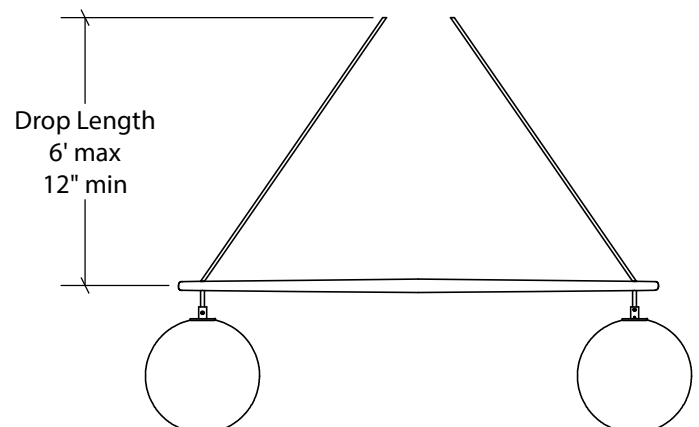

- ② Measure the cord length and use painter's tape to indicate a stop point. Make sure both cord lengths are exactly the same size or the fixture will not hang straight.

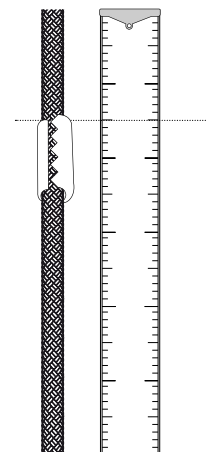

- ③ Feed the cord through the canopy strain relief until the tape reaches the canopy and tighten the set screw.
- ④ Tie a knot in the cord inside the canopy and cut the excess cord down to at least 8" and strip the outer jacket.
- ⑤ Install the canopy mounting plate over the junction box and attach the canopy, along with the fixture, onto the mounting plate. Make electrical connections to the power supply.

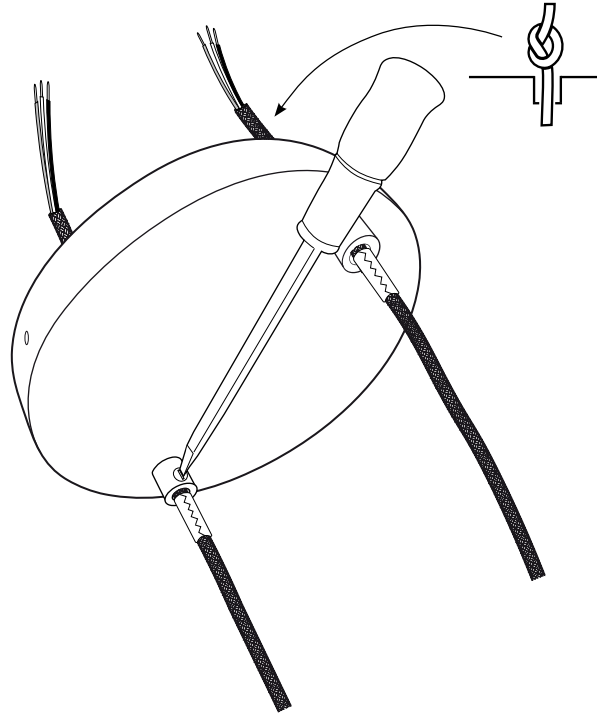

- ⑥ Remove the shade retainer and washer from socket assemblies. Slide the glass shades over the sockets and secure the glass using the washer between the glass retainer.

