


## Plura flush mount




The Plura is a simple, straight forward fixture that is excellently executed. With the Plura it was about resolving the seams and edges and their relationships to one another. The result is a scalable fixture that has a sharp, sophisticated feel.

Nick Sheridan, Designer




walnut (CM-001)



dark stained walnut (CM-002)



white washed oak (CM-095)



frosted polymer (CM-051)




matte black (CM-085) with matte white interior




brushed aluminum (CM-012)




brushed rose gold (CM-046)




brushed brass (CM-047)



distressed brass (CM-096)



gloss white (CM-054)

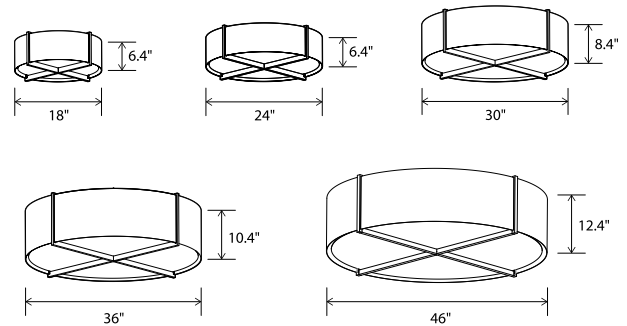

### Dimensions:

Plura 18: 18" Ø, 6.4"  
 Plura 24: 24" Ø, 6.4"  
 Plura 30: 30" Ø, 8.4"  
 Plura 36: 36" Ø, 10.4"  
 Plura 46: 46" Ø, 12.4"

**Materials:** solid wood, polymer

### Product weight:

Plura 18: 5 lb  
 Plura 24: 6 lb  
 Plura 30: 9 lb  
 Plura 36: 13 lb  
 Plura 46: 20 lb

### Integrated LED Specifications

#### Light output:

Plura 18 & 24: 1690 Lumens (source)  
 Plura 30, 36, & 46: 2815 Lumens (source)  
**Light color:** 2700 K, 3000 K, 3500 K, or 4000 K

**Color accuracy:** 90+ CRI

#### Power usage:

Plura 18 & 24: 19.5 W  
 Plura 30, 36, & 46: 32.5 W  
 Dimmable (see driver below)

### GU-24 Base Specifications

#### Light source:

Plura 18 & 24: 2x GU-24 base socket  
 Plura 30, 36, & 46: 4x GU-24 base socket  
**Lamping:**  
 Plura 18 & 24: 2x GU-24 base self-ballasted bulbs, 18 W max each  
 Plura 30, 36, & 46: 4x GU-24 base self-ballasted bulbs, 18 W max each  
 Bulbs not included  
 Input voltage: 300 V AC max

Wood grain will vary  
 Specifications subject to change



**Emergency backup option available upon request.**

Also available in a pendant version.

### MATERIAL & FINISH OPTIONS

#### Plura flush mount part # 08-100-

#### Size

18" Ø	<b>18</b>
24" Ø	<b>24</b>
30" Ø	<b>30</b>
36" Ø	<b>36</b>
46" Ø	<b>46</b>

#### Wood Body

walnut (CM-001)	<b>W</b>
dark stained walnut (CM-002)	<b>D</b>
white washed oak (CM-095)	<b>O</b>

#### Shade Material

frosted polymer (CM-051)	<b>F</b>
matte black (CM-085) with matte white interior	<b>B</b>
brushed aluminum (CM-012)	<b>A</b>
brushed rose gold (CM-046)	<b>G</b>
brushed brass (CM-047)	<b>R</b>
distressed brass (CM-096)	<b>D</b>
gloss white (CM-054)	<b>W</b>

#### Lamping

2700 K LED	<b>27</b>
3000 K LED	<b>30</b>
3500 K LED	<b>35</b>
4000 K LED	<b>40</b>
GU-24 base sockets	<b>GU</b>

#### Driver (LED version only)

AC Input Voltage Range: 120-277 V	<b>P1</b>
120 V input: TRIAC, ELV & 0-10 V dimmable	
240 & 277 V input: only 0-10 V dimmable	

**Includes:** frosted polymer (CM-051)

