

Project Contact

Fill in the shaded boxes using the information listed below

Order Code **R-0050** - - - - - - -

Model **R** **A** SUSPENSION **B** EXTERIOR SHADE FINISH **C** INTERIOR SHADE FINISH **D** LIGHT ENGINE DISC **E** LAMPING CCT **F** LIGHT OUTPUT **G** OPTION CODE




EXAMPLE ORDER CODE R-0050 - R 049 - 060 - 001 - 30 - F - EM



corded, textured black outside, distressed brass inside, walnut light engine disc, 3000 K.




corded, textured white outside, textured white inside, white washed oak light engine disc, 3000 K.

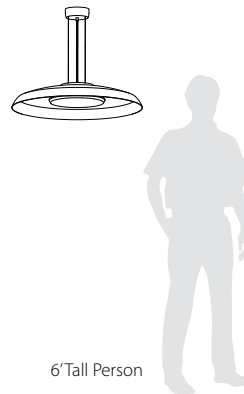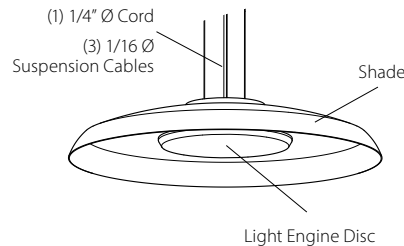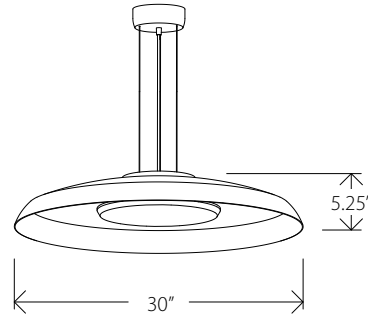

A SUSPENSION

W Corded White



B Corded Black

Canopy color will match cord color.

R Rigid Stem



Rigid stem and canopy matches finish of shade exterior.

B EXTERIOR SHADE FINISH

049 Textured Black

060 Textured White

119 Brushed Aluminum

120 Brushed Brass

117 Distressed Brass

C INTERIOR SHADE FINISH

060 Textured White

119 Brushed Aluminum

120 Brushed Brass

117 Distressed Brass

D LIGHT ENGINE DISC

001 Walnut

002 Dark Stained Walnut

095 White Washed Oak

049 Textured Black

060 Textured White

119 Brushed Aluminum

120 Brushed Brass

117 Distressed Brass

E LAMPING CCT

27 2700K LED

30 3000K LED

35 3500K LED

40 4000K LED

CRI 90+

F LIGHT OUTPUT

F Full Output / Wattage

R 50% Reduced Output / Wattage

C Custom Reduction %

Full output:
2275 Lumens (delivered)
37 Watts

Custom Reduction
Percentage to reduce
both lumens and
wattage.

Full output based on
Textured White shade
interior with 3000K.

G OPTION CODE

EM For custom drop lengths add "XD" followed by desired *Overall Height* in inches at end of order code. Otherwise a standard 72" drop length is provided which is field cuttable.

EM Emergency Backup option.




FIXTURE SPECS

Dimensions: 30" Ø x 5.25"
Materials: Spun Aluminum Shade, Solid Wood or Spun Metal Accent, Protective Powder Coated Finishes
Product weight: 13 lb
Light source: Integrated LED
Light output: 2275 Lumens (Textured White shade interior)
Color accuracy: 90+ CRI

DRIVER SPECS


120-277 V AC Input
0-10 V dimming down to 1% with dim to off
LED driver integrated into fixture

SUSPENSION



Corded Suspension
Canopy 5" Ø X 2"H


- Textured White (CM-060) or Textured Black (CM-049)
- 3 x 1/16" Stainless Steel Cables (CM-053)
- Field adjustable drop length: 1'0" min - 8'0" max
- Suitable for a sloped ceiling up to 30 degrees
- For extended cable length, please specify using XD designator in SKU builder
- 5-Conductor SVT Cable - color to match canopy (3 wires for AC power & ground, 2 wires for 0-10V dimming control)



Rigid Suspension
Canopy 8" Ø X 0.38"H

- Stem and canopy finish to match exterior shade finish
- 0.5" Ø rigid stem
- Field cuttable: 1'0" min - 8'0" max
- Suitable for a sloped ceiling up to 30 degrees
- For extended stem length, please specify using XD designator in SKU builder
- White 5-Conductor SVT Cable inside rigid stem (3 wires for AC power & ground, 2 wire for 0-10V dimming control)

PHOTOMETRIC POLAR GRAPH



Ⓑ EXTERIOR SHADE FINISH

				
Textured Black Powder Coat CM-049	Textured White Powder Coat CM-060	Brushed Aluminum CM-119	Brushed Brass CM-120	Distressed Brass CM-117

Ⓒ INTERIOR SHADE FINISH

			
Textured White Powder Coat CM-060	Brushed Aluminum CM-119	Brushed Brass CM-120	Distressed Brass CM-117

Ⓓ LIGHT ENGINE DISC FINISH

			
Walnut CM-001	Dark Stained Walnut CM-002	White Washed Oak CM-095	Textured Black Powder Coat CM-049
			
Textured White Powder Coat CM-060	Brushed Aluminum CM-119	Brushed Brass CM-120	Distressed Brass CM-117