

Project

Contact

Fill in the shaded boxes using the information listed below



Order Code	R-0050	-		-		-		-		-	
Model		(A) SUSPEN-	(B) EXTERIOR	(C) INTERIOR	(D) LIGHT	(E) LAMPING	(F) LIGHT	(G) OPTION			
EXAMPLE ORDER CODE	R-0050	-	R	049	-	060	-	001	-	30	-
										F	-
										EM	



corded, textured black outside, distressed brass inside, walnut light engine disc, 3000 K.



corded, textured white outside, textured white inside, white washed oak light engine disc, 3000 K.

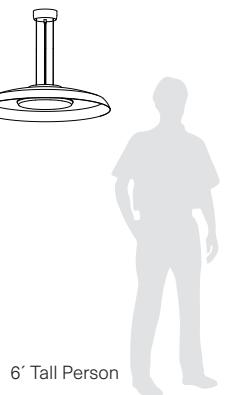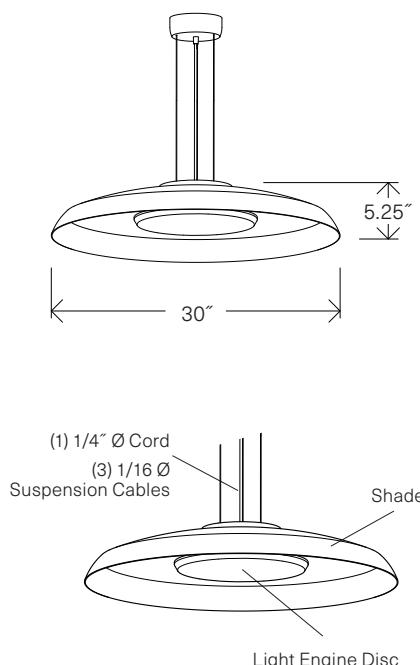

(E) LAMPING CCT

27 2700K LED

30 3000K LED

35 3500K LED

40 4000K LED

CRI 90+

(F) LIGHT OUTPUT

F Full Output / Wattage

R 50% Reduced Output / Wattage

C Custom Reduction %

Full output:

2275 Lumens (delivered)

37 Watts

Custom Reduction

Percentage to reduce both lumens and wattage.

Full output based on Textured White shade interior with 3000K.

(G) OPTION CODE

EM For custom drop lengths add "XD" followed by desired *Overall Height* in inches at end of order code. Otherwise a standard 96" drop length is provided which is field cuttable.

EM Emergency Backup option.



Fixture Specs

Dimensions: 30" Ø x 5.25"

Materials: Spun Aluminum Shade, Solid Wood or Spun Metal Accent, Protective Powder Coated Finishes

Product weight: 13 lb

Light source: Integrated LED

Light output: 2275 Lumens (Textured White shade interior)

Color accuracy: 90+ CRI


Driver Specs

120-277 V AC Input


0-10 V dimming down to 1% with dim to off

LED driver integrated into fixture

Suspension



Corded Suspension
Canopy 5" Ø X 2"H




Rigid Suspension
Canopy 8" Ø X 0.38"H

- Textured White (CM-060) or Textured Black (CM-049)
- 3 x 1/16" Stainless Steel Cables (CM-053)
- Field adjustable drop length: 1'0" min - 8'0" max
- Suitable for a sloped ceiling up to 30 degrees
- For extended cable length, please specify using XD designator in SKU builder
- 5-Conductor SVT Cable - color to match canopy (3 wires for AC power & ground, 2 wires for 0-10V dimming control)

- Stem and canopy finish to match exterior shade finish
- 0.5" Ø rigid stem
- Field cuttable: 1'0" min - 8'0" max
- Suitable for a sloped ceiling up to 30 degrees
- For extended stem length, please specify using XD designator in SKU builder
- White 5-Conductor SVT Cable inside rigid stem (3 wires for AC power & ground, 2 wire for 0-10V dimming control)


Photometric Polar Graph



(B) EXTERIOR SHADE FINISH



Textured Black Powder Coat
CM-049



Textured White Powder Coat
CM-060



Brushed Aluminum
CM-119



Brushed Brass
CM-120



Distressed Brass
CM-117

(C) INTERIOR SHADE FINISH



Textured White Powder Coat
CM-060



Brushed Aluminum
CM-119



Brushed Brass
CM-120



Distressed Brass
CM-117

(D) LIGHT ENGINE DISC FINISH



Walnut
CM-001



Dark Stained Walnut
CM-002



White Washed Oak
CM-095




Textured Black Powder Coat
CM-049



Textured White Powder Coat
CM-060



Brushed Aluminum
CM-119



Brushed Brass
CM-120



Distressed Brass
CM-117