





matte black with white matte

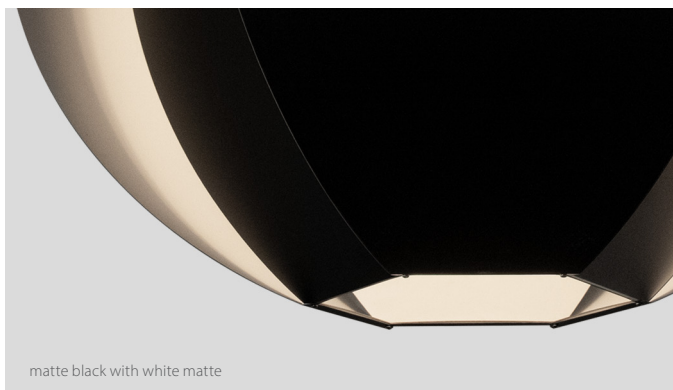

matte black with white matte

Veris was a concept we started exploring ten years ago. Two offset layers of petals simultaneously shield the light source while allowing reflected light to wash the inside petals, creating a dramatic ambient luminaire. The form materializes through a series of processes that utilize cutting edge CNC laser technology but still rely on skilled hand-rolling and bending of the aluminum petals.

Veris 34 pendant

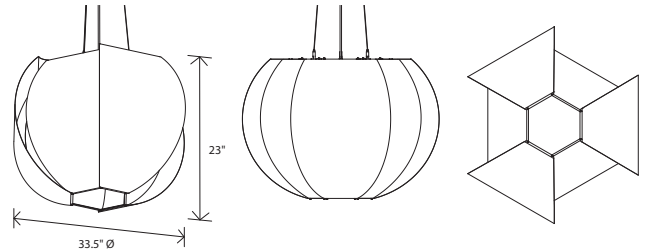


Dimensions: 33.5" Ø, 23"
Product weight: 8 lb
Suitable for a sloped ceiling

Integrated LED Specifications
Light output: 2815 Lumens (source)
Light color: 2700 K, 3000 K, 3500 K or 4000 K
Color accuracy: 90+ CRI
Power usage: 32.5 W
Dimmable (see driver below)
Driver must be housed in J-box
Driver dimensions: 3.3" x 2.4" x 1", included

E26 Medium Base Specifications
Lamping: 3x E26 base, type A lamp, 60 W max
Input voltage: 250 V AC max
Bulb not included

Textured Black (CM-049) extended round canopy with SVT-3 Cable, Black (CM-039) and 1/16" Stainless Steel Cables (CM-053)
Canopy dimensions: 5" Ø, 2"
See website for more canopy information
Field adjustable drop length: 1'0" min - 8'0" max
Specifications subject to change



textured black extended round canopy with black SVT-3 cable and steel cables




matte black (CM-085) with matte white interior



brushed aluminum (CM-012)




brushed rose gold (CM-046)



brushed brass (CM-047)



distressed brass (CM-096)



gloss white (CM-054)



MATERIAL & FINISH OPTIONS

Veris 34 part # 06-260-34 -

Shade Material

- matte black (CM-085) with matte white interior
- brushed aluminum (CM-012)
- brushed rose gold (CM-046)
- brushed brass (CM-047)
- distressed brass (CM-096)
- gloss white (CM-054)

Lamping*

- 2700 K LED
- 3000 K LED
- 3500 K LED
- 4000 K LED
- medium base E26 socket

Driver (LED version only)

- AC Input Voltage Range: 120-277 V
- 120 V input: TRIAC, ELV & 0-10 V dimmable
- 240 & 277 V input: only 0-10 V dimmable

