




gloss white



matte black with white matte

Veris was a concept we started exploring ten years ago. Two offset layers of petals simultaneously shield the light source while allowing reflected light to wash the inside petals, creating a dramatic ambient luminaire. The form materializes through a series of processes that utilize cutting edge CNC laser technology but still rely on skilled hand-rolling and bending of the aluminum petals.

## Veris 22 pendant

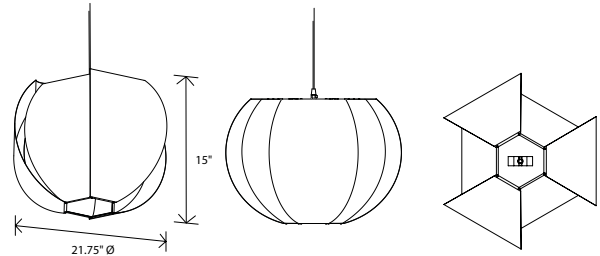

Dimensions: 21.75" Ø, 15"  
 Product weight: 4 lb  
 Suitable for a sloped ceiling

### Integrated LED Specifications

Light output: 1690 Lumens (source)  
 Light color: 2700 K, 3000 K, 3500 K or 4000 K  
 Color accuracy: 90+ CRI  
 Power usage: 19.5 W  
 Dimmable (see driver below)  
 Driver must be housed in J-box  
 Driver dimensions: 3.3" x 1.6" x 1", included

### E26 Medium Base Specifications

Lamping: E26 base, type A lamp, 60 W max  
 Input voltage: 250 V AC max  
 Bulb not included

Textured Black Powdercoat (CM-049) low profile round canopy with SVT-3 Cable, Black (CM-039)  
 Canopy dimensions: 5" Ø, 0.3"  
 See website for more canopy information  
 Field adjustable drop length: 0'6" min - 8'0" max  
 Specifications subject to change



### MATERIAL & FINISH OPTIONS

Veris 22 pendant part # 06-260-22

#### Shade Material



- matte black (CM-085) with matte white interior
- brushed aluminum (CM-012)
- brushed rose gold (CM-046)
- brushed brass (CM-047)
- distressed brass (CM-096)
- gloss white (CM-054)

#### Lamping\*

- 2700 K LED
- 3000 K LED
- 3500 K LED
- 4000 K LED
- medium base E26 socket

#### Driver (LED version only)

AC Input Voltage Range: 120-277 V  
 120 V input: TRIAC, ELV & 0-10 V dimmable  
 240 & 277 V input: only 0-10 V dimmable

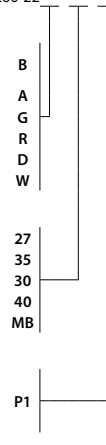

low-profile round canopy with SVT-3 cable




matte black (CM-085) with matte white interior



brushed aluminum (CM-012)




brushed rose gold (CM-046)



brushed brass (CM-047)



distressed brass (CM-096)



gloss white (CM-054)

