

# Volo 14 flush mount

Part of the Volo collection

cerno®



**noir**  
black exterior, brushed brass interior,  
dark stained walnut disc




**blanc**  
white exterior, white interior,  
white washed oak disc




**cava**  
white exterior, brushed brass interior,  
walnut disc




**deux**  
black exterior, white interior,  
walnut disc

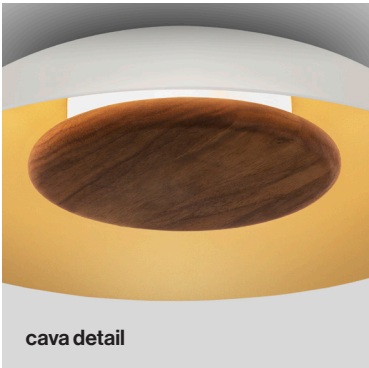

**cava detail**

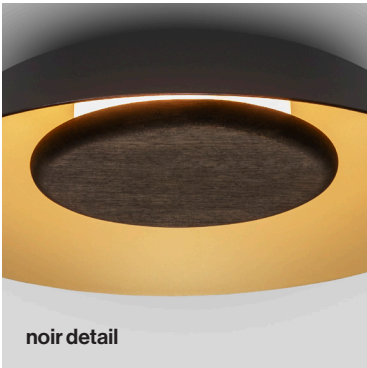

**noir detail**



Dimensions: 13.5" dia, 3.6"  
Product weight: 4 lb  
Light source: integrated LED  
Light output: 1790 Lumens (source)  
Output based on white shade interior  
Alternate finishes will reduce lumen output  
Light color: 2700 K, 3000 K, 3500 K, or 4000 K  
Color accuracy: 90+ CRI  
Power usage: 18 W  
Driver must be housed in J-box or remotely  
Driver dimensions: 3.38" x 1.63" x 1.08"  
Dimmable (see driver option)  
Wood grain will vary. Specifications subject to change.



## MATERIAL AND FINISH OPTIONS

Volo 14 flush mount part # 08-160-

### FINISH OPTIONS

noir  
blanc  
cava  
deux

N  
B  
C  
D

### LAMPING

2700 K LED  
3000 K LED  
3500 K LED  
4000 K LED

27  
30  
35  
40

### DRIVER OPTION

AC Input Voltage Range: 120-277 V  
120 V input: TRIAC, ELV & 0-10 V dimmable  
240 & 277 V input: only 0-10 V dimmable


P1

For expanded offering see Specification Sheet.


Volo 14 is a petite evolution of the original Volo. The smaller shade transforms this fixture into the ideal solution for a memorable design moment in a smaller kitchen, bath, or corridor. The Volo collection is a celebration of natural materials. The solid hardwood, brass finish, leather, and aluminum showcase the purposeful design that went into each detail. The indirect LED light source emits light of beautiful quality.



6' tall person

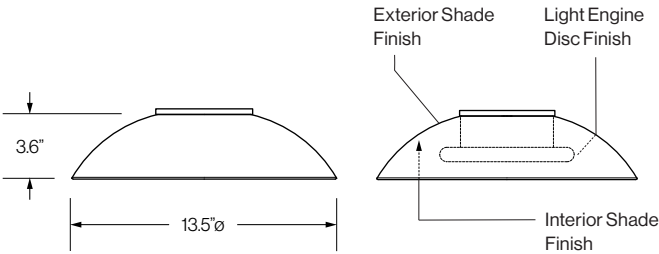

PHOTOMETRIC POLAR GRAPH

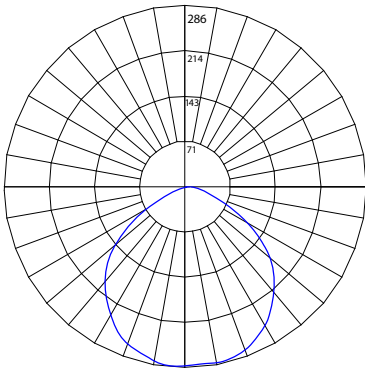

Output specifications shown for 2700K CCT and white interior shade finish for vertical plane through 0-180 degree horizontal angles. Other CCTs and material finishes may cause output specifications to vary.

Maximum Candela = 285.82  
Located at  
Horizontal Angle = 180,  
Vertical Angle = 5

TECHNICAL SPECIFICATIONS

- Light source: integrated LED
- Light output: 1790 Lumens (source)
- Output based on white shade interior
- Alternate finishes will reduce lumen output
- Light color: 2700 K, 3000 K, 3500 K, or 4000 K
- Color accuracy: 90+ CRI
- Input voltage: 120-277 V AC
- Power usage: 18 W
- Driver location: must be housed in J-box or remotely
- Driver dimensions: 3.38" x 1.63" x 1.08"
- Dimmable (see driver option)
- Suitable for a sloped ceiling up to 45 degrees
- Specifications subject to change



Standard combinations on the previous page are stocked. Fixture specified by using the SKU builder below are subject to increased lead times and minimum order quantities.

Volo 14 flush mount part # 08-160-	
<b>EXTERIOR SHADE FINISH</b>	
textured black powder coat (CM-049)	B
textured white powder coat (CM-060)	W
brushed brass (CM-120)	R
distressed brass (CM-117)	D
<b>INTERIOR SHADE FINISH</b>	
textured white powder coat (CM-060)	W
brushed brass (CM-120)	R
distressed brass (CM-117)	D
<b>LIGHT ENGINE DISC FINISH</b>	
walnut (CM-001)	W
dark stained walnut (CM-002)	D
white washed oak (CM-095)	O
<b>LAMPING</b>	
2700 K LED	27
3000 K LED	30
3500 K LED	35
4000 K LED	40
<b>DRIVER OPTION</b>	
AC Input Voltage Range: 120-277 V	
120 V input: TRIAC, ELV & 0-10 V dimmable	P1
240 & 277 V input: only 0-10 V dimmable	

FINISHES

