


cerno®



Volo Pendant

DESIGNED AND MADE IN CALIFORNIA

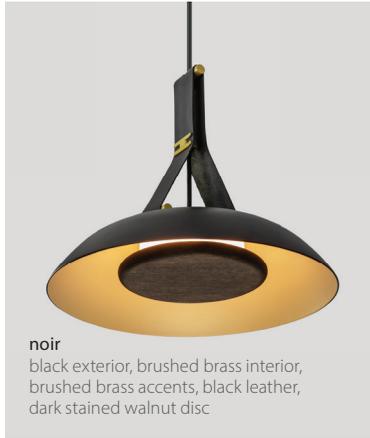


noir
black exterior, brushed brass interior,
brushed brass accents, black leather,
dark stained walnut disc



blanc
white exterior & interior, brushed brass
accents, tan leather, white washed oak disc




cava
white exterior, brushed brass interior,
brass accents, brown leather, walnut disc

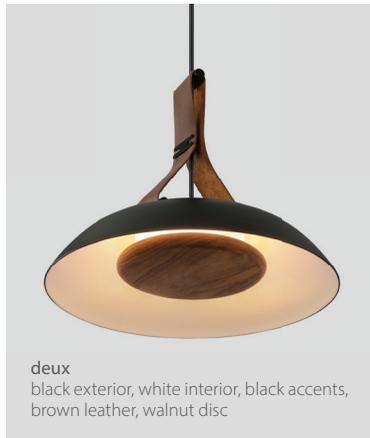

deux
black exterior, white interior, black accents,
brown leather, walnut disc




noir detail

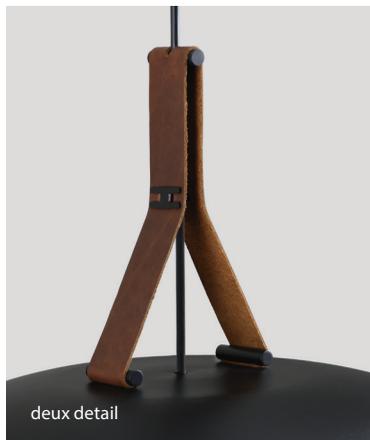

deux detail

Volo 14 is a petite evolution of the original Volo. The smaller shade transforms this fixture into the ideal solution for a memorable design moment in a smaller kitchen, bath, or corridor. The Volo collection is a celebration of natural materials. The solid hardwood, brass finish, leather, and aluminum showcase the purposeful design that went into each detail. The indirect LED light source emits light of beautiful quality.

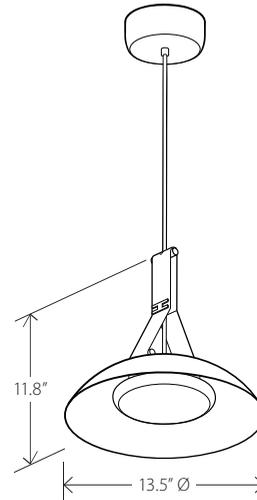

Dimensions: 13.5" dia, 11.8"
Product weight: 4 lb
Light source: integrated LED
Light output: 1790 Lumens (source)
Output based on white shade interior
Alternate finishes will reduce lumen output
Light color: 2700 K, 3000 K, 3500 K, or 4000 K
Color accuracy: 90+ CRI
Power usage: 18 W
Driver can be housed inside extended canopy
Driver to be housed remotely if low profile canopy is used
Driver dimensions: 3.38" x 1.63" x 1.08"
Dimmable (see driver option)
Wood grain will vary. Specifications subject to change.



MATERIAL AND FINISH OPTIONS

Volo 14 pendant part # 06-400-

Finish Options

- noir
- blanc
- cava
- deux

N
B
C
D

Lamping

- 2700 K LED
- 3000 K LED
- 3500 K LED
- 4000 K LED


27
30
35
40

Driver Option


- AC Input Voltage Range: 120-277 V
- 120 V input: TRIAC, ELV & 0-10 V dimmable
- 240 & 277 V input: only 0-10 V dimmable

P1

For expanded offering see Specification Sheet.



⚠ **WARNING.** California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

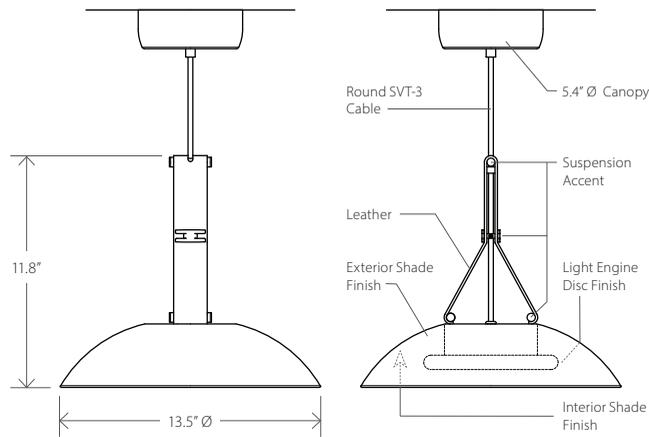

Standard combinations on the previous page are stocked. Fixture specified by using the SKU builder below are subject to increased lead times and minimum order quantities.

Volo 14 pendant part # 06-400-

Exterior Shade Finish

- textured black powder coat (CM-049)
- textured white powder coat (CM-060)
- brushed brass (CM-120)
- distressed brass (CM-117)

Interior Shade Finish

- textured white powder coat (CM-060)
- brushed brass (CM-120)
- distressed brass (CM-117)

Suspension Accent Finish

- textured black powder coat (CM-049)
- textured white powder coat (CM-060)
- brushed brass (CM-120)

Leather Finish

- brown leather (CM-098)
- black leather (CM-127)
- tan leather (CM-128)

Light Engine Disc Finish

- walnut (CM-001)
- dark stained walnut (CM-002)
- white washed oak (CM-095)

Lamping


- 2700 K LED
- 3000 K LED
- 3500 K LED
- 4000 K LED

Driver Option

- AC Input Voltage Range: 120-277 V
- 120 V input: TRIAC, ELV & 0-10 V dimmable
- 240 & 277 V input: only 0-10 V dimmable

| | | | | | | | | | |
|----|----|----|----|----|--|--|--|--|--|
| B | W | R | D | | | | | | |
| W | R | D | | | | | | | |
| B | W | R | | | | | | | |
| R | B | T | | | | | | | |
| W | D | O | | | | | | | |
| 27 | 30 | 35 | 40 | | | | | | |
| | | | | P1 | | | | | |

PHOTOMETRIC POLAR GRAPH

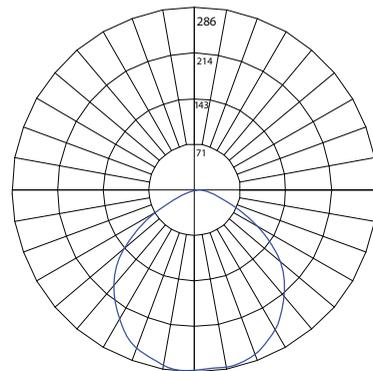

Output specifications shown for 2700K CCT and white interior shade finish for vertical plane through 0-180 degree horizontal angles. Other CCTs and material finishes may cause output specifications to vary.


Maximum Candela = 285.82
 Located at
 Horizontal Angle = 180,
 Vertical Angle = 5

TECHNICAL SPECIFICATIONS

- Light source: integrated LED
- Light output: 1790 Lumens (source)
- Output based on white shade interior
- Alternate finishes will reduce lumen output
- Light color: 2700 K, 3000 K, 3500 K, or 4000 K
- Color accuracy: 90+ CRI
- Input voltage: 120-277 V AC
- Power usage: 18 W
- Driver can be housed inside extended canopy
- Driver to be house remotely if low profile canopy is used
- Driver dimensions: 3.38" x 1.63" x 1.08"
- Dimmable (see driver option)
- Round canopy with SVT-3 Cable
- Extended and low profile canopies included
- Extended canopy dimensions: 5.4" Ø, 2"
- Low profile canopy dimensions: 5.0" Ø, .41"
- Field adjustable drop length: 0'6" min - 8'0" max
- White canopy and cord for fixtures with white shade exterior
- Black canopy and cord for all other finishes
- Suitable for a sloped ceiling up to 45 degrees
- Specifications subject to change



FINISHES

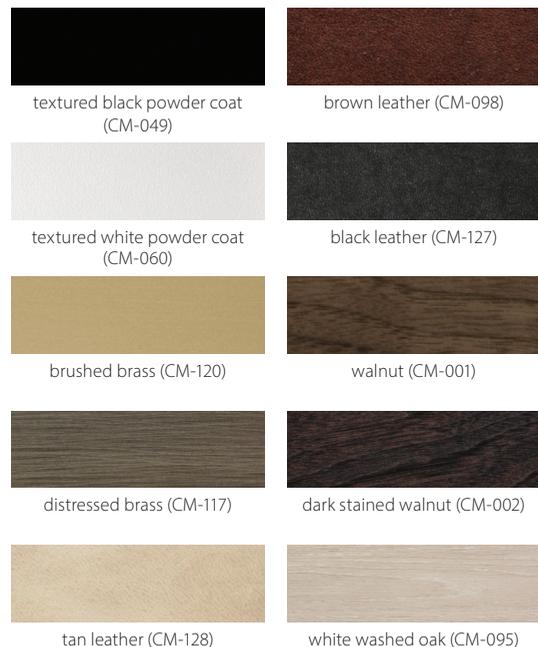

⚠ WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov