


**noir**  
black exterior, brushed brass interior,  
dark stained walnut disc



**blanc**  
white exterior, white interior,  
white washed oak disc

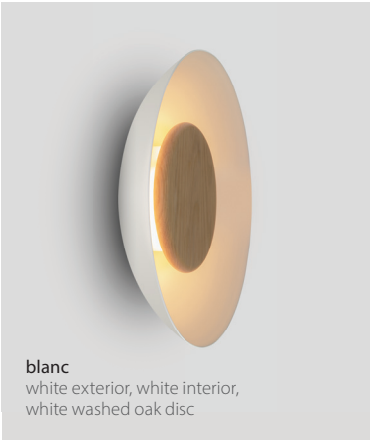


**cava**  
white exterior, brushed brass interior,  
walnut disc




**deux**  
black exterior, white interior, walnut disc



cava detail

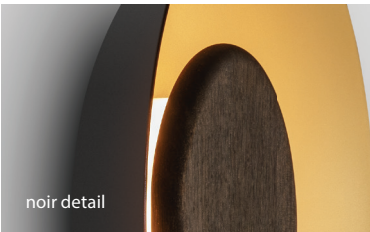

noir detail



Dimensions: 13.5" dia, 3.6"  
Product weight: 4 lb  
Light source: integrated LED  
Light output: 1790 Lumens (source)  
Output based on white shade interior  
Alternate finishes will reduce lumen output  
Light color: 2700 K, 3000 K, 3500 K, or 4000 K  
Color accuracy: 90+ CRI  
Power usage: 18 W  
Driver must be housed in J-box or remotely  
Driver dimensions: 3.38" x 1.63" x 1.08"  
Dimmable (see driver option)  
Wood grain will vary. Specifications subject to change.





MATERIAL AND FINISH OPTIONS

Volo 14 sconce part # 08-160-		-
Finish Options	noir	N
	blanc	B
	cava	C
	deux	D
Lamping	2700 K LED	27
	3000 K LED	30
	3500 K LED	35
	4000 K LED	40
Driver Option	AC Input Voltage Range: 120-277 V	
	120 V input: TRIAC, ELV & 0-10 V dimmable	P1
	240 & 277 V input: only 0-10 V dimmable	


For expanded offering see Specification Sheet.

Volo 14 is a petite evolution of the original Volo. The smaller shade transforms this fixture into the ideal solution for a memorable design moment in a smaller kitchen, bath, or corridor. The Volo collection is a celebration of natural materials. The solid hardwood, brass finish, leather, and aluminum showcase the purposeful design that went into each detail. The indirect LED light source emits light of beautiful quality.



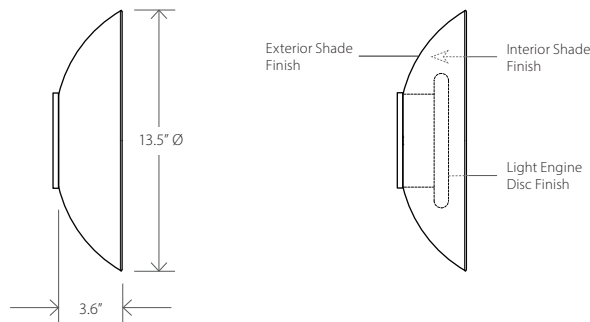

PHOTOMETRIC POLAR GRAPH

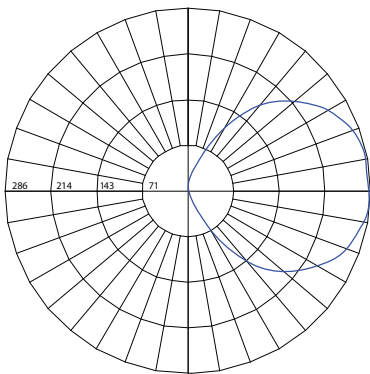

Output specifications shown for 2700K CCT and white interior shade finish for vertical plane through 0-180 degree horizontal angles. Other CCTs and material finishes may cause output specifications to vary.

Maximum Candela = 285.82  
Located at  
Horizontal Angle = 180,  
Vertical Angle = 5

TECHNICAL SPECIFICATIONS

- Light source: integrated LED
- Light output: 1790 Lumens (source)
- Output based on white shade interior
- Alternate finishes will reduce lumen output
- Light color: 2700 K, 3000 K, 3500 K, or 4000 K
- Color accuracy: 90+ CRI
- Input voltage: 120-277 V AC
- Power usage: 18 W
- Driver location: must be housed in J-box or remotely
- Driver dimensions: 3.38" x 1.63" x 1.08"
- Dimmable (see driver option)
- Suitable for a sloped ceiling up to 45 degrees
- Specifications subject to change



Standard combinations on the previous page are stocked. Fixture specified by using the SKU builder below are subject to increased lead times and minimum order quantities.

Volo 14 sconce part # 08-160-

<b>Exterior Shade Finish</b>		
textured black powder coat (CM-049)	B	
textured white powder coat (CM-060)	W	
brushed brass (CM-120)	R	
distressed brass (CM-117)	D	
<b>Interior Shade Finish</b>		
textured white powder coat (CM-060)	W	
brushed brass (CM-120)	R	
distressed brass (CM-117)	D	
<b>Light Engine Disc Finish</b>		
walnut (CM-001)	W	
dark stained walnut (CM-002)	D	
white washed oak (CM-095)	O	
<b>Lamping</b>		
2700 K LED	27	
3000 K LED	30	
3500 K LED	35	
4000 K LED	40	
<b>Driver Option</b>		
AC Input Voltage Range: 120-277 V		
120 V input: TRIAC, ELV & 0-10 V dimmable		
240 & 277 V input: only 0-10 V dimmable		
	P1	

FINISHES

