



noir : black exterior, brass interior, and dark stained walnut disc



blanc : white exterior and interior and white washed oak disc




deux : black exterior, white interior, and walnut disc



cava : white exterior, brushed brass interior, and walnut disc

Volo 36 flush mount

part of the Volo collection

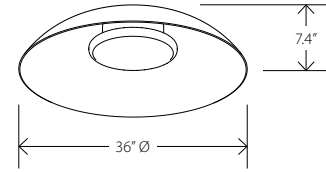

- Dimensions: 36" dia, 7.4"
- Product weight: 19 lb
- Light source: integrated LED
- Light output: 3636 Lumens (source)
- Output based on white shade interior
- Alternate finishes will reduce lumen output
- Light color: 2700 K, 3000 K, 3500 K, or 4000 K
- Color accuracy: 90+ CRI
- Power usage: 36 W
- Driver can be housed in canopy, J-box, or remotely
- Driver dimensions: 4.07" x 1.03" x .93"
- Dimmable (see driver option)
- Wood grain will vary
- Specifications subject to change



MATERIAL AND FINISH OPTIONS

Volo 36 flush mount part # 08-150-

Finish Options

- noir
- blanc
- cava
- deux

N
B
C
D

Lamping

- 2700 K LED
- 3000 K LED
- 3500 K LED
- 4000 K LED


27
30
35
40

Driver Option

- AC Input Voltage Range: 120-277 V
- 120 V input: TRIAC, ELV & 0-10 V dimmable
- 240 & 277 V input: only 0-10 V dimmable


P1

The Volo 36 Flush mount design transcends and blurs the lines where art and utility meet. It is composed of familiar shapes of varied sizes and materials. We scrutinized the nuanced proportions to ensure the original form was not compromised by simply scaling up every dimension. The result is a balanced and voluminous light fixture that produces a beautiful quality of light. Similar to the Volo 18 and 24, the 36 use of metal, solid hardwood, and leather is luxurious and also feels natural and warm. The care and craftsmanship that go into making each Cerno fixture is really on display when admiring the Volo.




6' tall person

⚠ WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

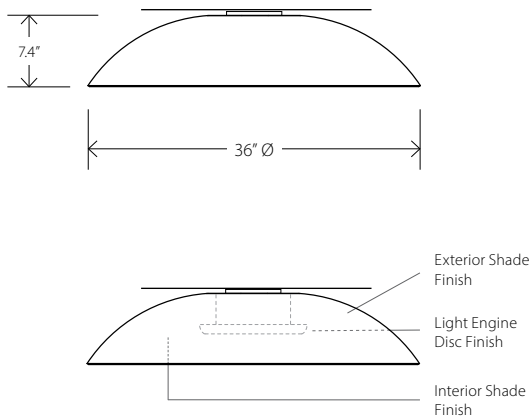

PHOTOMETRIC POLAR GRAPH

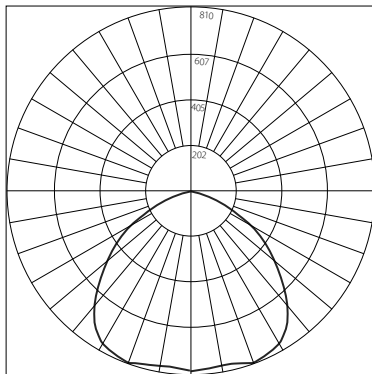

Maximum Candela = 809
 Located at Horizontal Angle = 140
 Vertical Angle = 20

TECHNICAL SPECIFICATIONS

- Light source: integrated LED
- Light output: 3636 Lumens (source)
- Output based on white shade interior
- Alternate finishes will reduce lumen output
- Light color: 2700 K, 3000 K, 3500 K, or 4000 K
- Color accuracy: 90+ CRI
- Input Voltage: 120-277 V AC
- Power usage: 36 W
- Driver location: can be housed in canopy, J-box, or remotely
- Driver dimensions: 4.07" x 1.03" x .93"
- Canopy dimensions: 8.13" dia, 1.25"
- Dimmable (see driver option)
- Specifications subject to change



Standard combinations on the previous page are stocked. Fixtures specified by using the SKU builder below are subject to increased lead times and minimum order quantities.

MATERIAL AND FINISH OPTIONS

Volo 36 flush mount part # 08-150-

Exterior Shade Finish

- textured black powder coat (CM-049)
- textured white powder coat (CM-060)
- brushed brass (CM-120)
- distressed brass (CM-117)

B
W
R
D

Interior Shade Finish

- textured white powder coat (CM-060)
- brushed brass (CM-120)
- distressed brass (CM-117)

W
R
D

Light Engine Disc Finish

- walnut (CM-001)
- dark stained walnut (CM-002)
- white washed oak (CM-095)

W
D
O

Lamping

- 2700 K LED
- 3000 K LED
- 3500 K LED
- 4000 K LED

27
30
35
40

Driver Option

- AC Input Voltage Range: 120-277 V
- 120 V input: TRIAC, ELV & 0-10 V dimmable
- 240 & 277 V input: only 0-10 V dimmable

P1


FINISHES




textured black powder coat (CM-049)




walnut (CM-001)



textured white powder coat (CM-060)



dark stained walnut (CM-002)



brushed brass (CM-120)



white washed oak (CM-095)



distressed brass (CM-117)

WARNING. California Proposition 65 Warning for California Consumers. This product can expose you to chemicals including wood dust and lead which are known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov