

Project

Contact

Fill in the shaded boxes using the information listed below

Order Code **03-300** -  -  -  -  -  -

Model	(A) WIDTH	(B) FINISH	(C) PROFILE	(D) MOUNTING	(E) LAMPING	(F) DRIVER PACKAGE
03-300	12	AL	L	D	27	P1



Round Profile, Standard Mount, Gold



Low Profile, Direct Wire Wall Mount, White



Low Profile, Direct Wire Wall Mount, Oil Rubbed Bronze

### (A) WIDTH

	FIXTURE WIDTH	CANVAS WIDTH RANGE
<b>12</b>	12"	0 - 26"
<b>18</b>	18"	20" - 34"
<b>24</b>	24"	26" - 42"
<b>36</b>	36"	38" - 53"
<b>48</b>	48"	50" - 64"

### (B) FINISH - STANDARD

- BL** Black Powder Coat
- BZ** Oil Rubbed Bronze
- GD** Gold Powder Coat
- WT** White Powder Coat
- AL** Brushed Aluminum

### (B) FINISH - PREMIUM


- BB** Brushed Brass
- SN** Satin Nickel

See page 2 for color swatches. Material samples available upon request.

### (C) PROFILE

Cerno Art Light is available in 2 hood profiles.


- L** Low Profile
- R** Round Profile

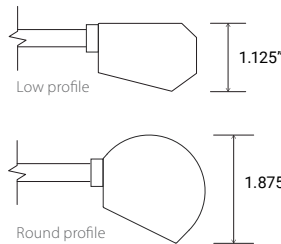

### (D) MOUNTING

Cerno Art Light is available in 2 mounting options.


- S** Standard Mount
- D** Direct Wire Wall Mount

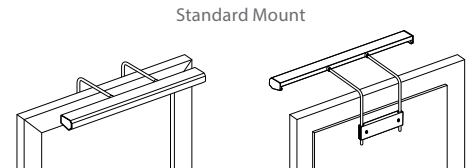

The Standard Mount includes two slim 90° arms that slide into a mounting bracket. The mounting bracket can be installed on the back of the frame or directly to the wall behind the art. Compatible with a plug-in power supply or can be hardwired to a power supply within a j-box.

**Note:** Plugin version is non-dimmable and must be plugged into a non-dimmed circuit.

### Direct Wire Wall Mount

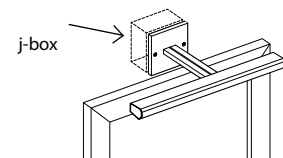

The Direct Wire Wall Mount attaches to a j-box above an art piece. External driver can be housed in the j-box or installed remotely.

### (E) LAMPING CCT

- 27** 2700K LED
- 30** 3000K LED
- 35** 3500K LED

CRI 90+  
R9 values 85+

SIZE	SOURCE LUMENS	POWER WATTS
12" Width	477	7W
18" Width	737	10.5W
24" Width	997	14W
36" Width	1517	21W
48" Width	2037	28W

### (F) DRIVER PACKAGE

- P0** No Driver\*
- PL** Plugin, 120-240V input, Non-dimmable\*\* includes in-line rocker switch
- P1** Hardwire, 120V input Triac/ELV/0-10V Dimmable
- P2** Hardwire, 277V input Triac/ELV/0-10V Dimmable
- P3** Hardwire, 120-277V input Non-dimmable\*\*


\* Fixture must be connected to 24 Volt DC constant voltage class 2 LED driver supplied by others.

\*\* PL and P3 must be connected to a non-dimmed circuit.


- Drivers can be remotely mounted at 50' max distance.
- Multiple fixtures can be wired to single driver, not to exceed driver wattage.
- 0-10 V dimming = down to 1%
- ELV & Triac dimming = down to ~10%
- P3 is most cost effective hardwired option and is not available for the 48" width fixture.




## PROFILE AND MOUNTING CONFIGURATIONS




Low Profile  
Standard mount



Round Profile  
Standard mount



Low Profile  
Direct Wire Wall Mount



Round Profile  
Direct Wire Wall Mount

## PRODUCT DIMENSIONS

### Standard Mount


A	B	C
12"	8"	6"
18"	8"	6"
24"	8"	6"
36"	8"	12"
48"	8"	12"

### Direct Wire Wall Mount


A	B	C
12"	9.25"	4.5"
18"	9.25"	4.5"
24"	9.25"	4.5"
36"	9.25"	4.5"
48"	9.25"	4.5"

## DRIVER DIMENSIONS


SIZE	PL	P1	P2	P3
12"	3.9"x1.75"x1.25"	2.63"x1.25"x.81"	2.63"x1.25"x.81"	3"x1"x1.5"
18"	3.9"x1.75"x1.25"	2.63"x1.25"x.81"	2.63"x1.25"x.81"	3"x1"x1.5"
24"	3.9"x1.75"x1.25"	3"x1"x1.5"	3"x1"x1.5"	3"x1"x1.5"
36"	3.9"x1.75"x1.25"	3"x1"x1.5"	3"x1"x1.5"	3"x1"x1.5"
48"	4.44"x2"x1.25"	2.82"x2.5"x1.2"	2.82"x2.5"x1.2"	N/A



Mounting bracket included.

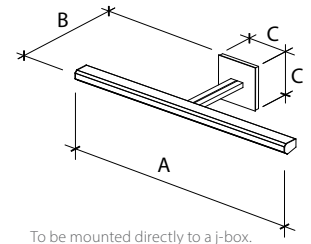

To be mounted directly to a j-box.




PL -  
Plug in power  
Cord length = 9'




P1, P2, P3 -  
Hardwire drivers  
must be housed in a  
suitable enclosure.

## FINISH SWATCHES - STANDARD

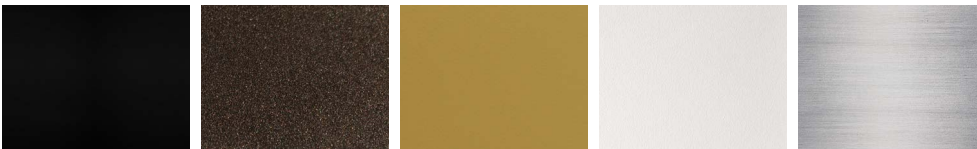

**BL** Black Powder Coat (CM-030) | **BZ** Oil Rubbed Bronze (CM-029) | **GD** Gold Powder Coat (CM-031) | **WT** White Powder Coat (CM-060) | **AL** Brushed Aluminum (CM-006)

## FINISH SWATCHES - PREMIUM

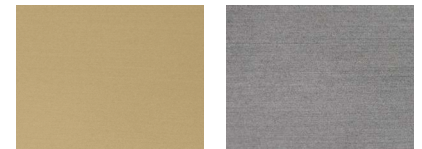

**BB** Brushed Brass (CM-120) | **SN** Satin Nickel (CM-124)

## INSTALLATION IMAGES



Round Profile, Standard Mount, Brushed Brass



Round Profile, Direct Wire Wall Mount,  
Satin Nickel



Low Profile, Direct Wire Wall Mount, Black

## DIFFUSING LENS



Detail shot of diffusing lens.