




Plura 36 Pendant, walnut

The Plura is a simple, straight forward fixture that is excellently executed. With the Plura it was about resolving the seams and edges and their relationships to one another. The result is a scalable fixture that has a sharp, sophisticated feel.

Nick Sheridan
Designer

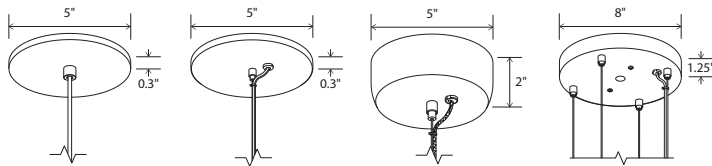


Plura 18 and Plura 24 low-profile round canopy with white SVT



Plura 30 GU-24 Base Sockets low-profile round canopy clear SPT with steel cable



Plura 30 Integrated LED extended round canopy clear SPT with steel cable




Plura 36 8" round canopy clear SPT with four 1/16" Ø steel cables



white washed oak (CM-095)



walnut (CM-001)



dark stained walnut (CM-002)



frosted polymer (CM-051)



matte black (CM-085) with matte white interior



brushed aluminum (CM-012)



brushed rose gold (CM-046)




brushed brass (CM-047)



distressed brass (CM-096)

Plura pendant

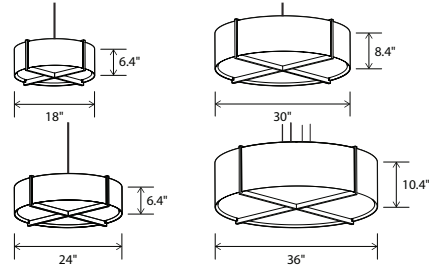

Dimensions:

Plura 18: 18" Ø, 6.4"

Plura 24: 24" Ø, 6.4"

Plura 30: 30" Ø, 8.4"

Plura 36: 36" Ø, 10.4"

Materials: solid wood, metal, polymer

Product weight:

Plura 18: 5 lb

Plura 24: 6 lb

Plura 30: 9 lb

Plura 36: 13 lb

MATERIAL & FINISH OPTIONS

Plura pendant part # 06-230-

Ø:

18" Ø

18

24" Ø

24

30" Ø

30

36" Ø

36

Wood Body

walnut (CM-001)

W

dark stained walnut (CM-002)

D

white washed oak (CM-095)

O

Shade Material

frosted polymer (CM-051)

F

matte black (CM-085)

B

with matte white interior

brushed aluminum (CM-012)

A

brushed rose gold (CM-046)

G

brushed brass (CM-047)

R

distressed brass (CM-096)

D

gloss white (CM-054)

W

Lamping

2700 K LED

27

3500 K LED

35

GU-24 base sockets

GU

Driver (LED version only)

AC Input Voltage Range:

120-277 V

120 V input: TRIAC, ELV & 0-10 V dimmable

240 & 277 V input: only 0-10 V dimmable

P1

Includes

frosted polymer (CM-051)

Integrated LED Specifications

Light output:

Plura 18 & 24: 1690 Lumens (source)

Plura 30 & 36: 2815 Lumens (source)

Light color: 2700 K or 3500 K

Color accuracy: 90+ CRI

Power usage:

Plura 18 & 24: 19.5 W

Plura 30 & 36: 32.5 W

Dimmable (see driver below)

Plura 18 & 24 driver location: must be housed in J-box

Driver dimensions: 3.3" x 1.6" x 1", included

Plura 30 & 36 driver location: housed in canopy

GU-24 Base Specifications

Light source:

Plura 18 & 24: 2x GU-24 base socket

Plura 30 & 36: 4x GU-24 base socket

Lamping:

Plura 18 & 24: 2x GU-24 base, 18 W max each

Plura 30 & 36: 4x GU-24 base, 18 W max each

Bulbs not included

Input voltage: 300 V AC max

See below for canopy information

96" drop length, field adjustable

Suitable for a sloped ceiling

Wood grain will vary

Specifications subject to change



gloss white (CM-054)