





Veris 34, matte black with matte white interior

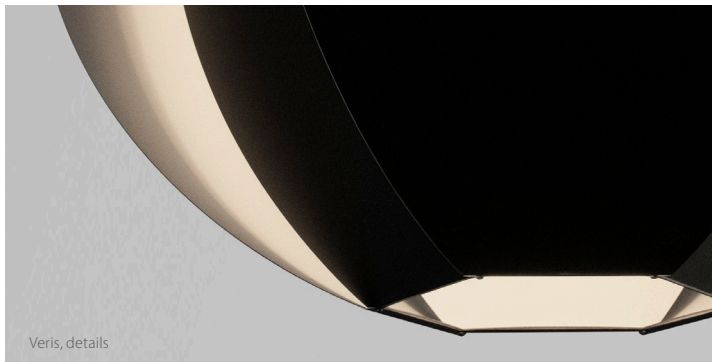

Veris, details

Veris was a concept we started exploring ten years ago. Two offset layers of petals simultaneously shield the light source while allowing reflected light to wash the inside petals, creating a dramatic ambient luminaire. The form materializes through a series of processes that utilize cutting edge CNC laser technology but still rely on skilled hand-rolling and bending of the aluminum petals.

### Veris 34 pendant

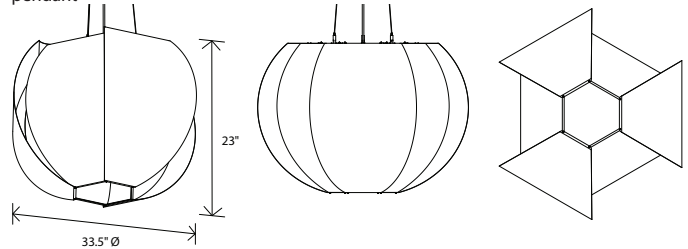

Dimensions: 33.5" Ø, 23"  
 Product weight: 8 lb  
 Suitable for a sloped ceiling

#### Integrated LED Specifications

Light output: 2815 Lumens (source)  
 Light color: 2700 K, 3000 K, 3500 K or 4000 K  
 Color accuracy: 90+ CRI  
 Power usage: 32.5 W  
 Dimmable (see driver below)  
 Driver housed in extended canopy  
 Driver dimensions: 3.3" x 2.4" x 1", included

#### E26 Medium Base Specifications

Lamping: 3x E26 base, type A lamp, 60 W max  
 Input voltage: 250 V AC max  
 Bulb not included

Textured Black Powdercoat (CM-049) extended round canopy with SVT-3 Cable, Black (CM-039) and 1/16" Stainless Steel Cables (CM-053)  
 Canopy dimensions: 5" Ø, 2"  
 See website for more canopy information  
 Field adjustable drop length: 1'0" min - 8'0" max  
 Specifications subject to change



matte black (CM-085) with matte white interior



brushed aluminum (CM-012)



brushed rose gold (CM-046)



brushed brass (CM-047)



distressed brass (CM-096)



gloss white (CM-054)

#### MATERIAL & FINISH OPTIONS

Veris part # 06-260-34

Shade Material	
matte black (CM-085) with matte white interior	B
brushed aluminum (CM-012)	A
brushed rose gold (CM-046)	G
brushed brass (CM-047)	R
distressed brass (CM-096)	D
gloss white (CM-054)	W
Lamping	
2700 K LED	27
3000 K LED	30
3500 K LED	35
4000 K LED	40
medium base E26 socket	MB
Driver (LED version only)	
AC Input Voltage Range: 120-277 V	
120 V input: TRIAC, ELV & 0-10 V dimmable	P1
240 & 277 V input: only 0-10 V dimmable	

