

## General Product Information

This product is suitable for indoor dry and damp locations only.


**Junction Box Requirements:** This product is to be installed to a deep 4" junction box with 3" round plaster ring or a deep octagon junction box. It is the installer's responsibility to ensure that the site conditions, junction box, and fasteners used are suitable to support the weight of the fixture.

Driver to be housed in junction box. Can be remote if necessary.

Fixture can be dimmed with TRIAC, ELV, Or 0-10V dimming at 120VAC input.  
For 240 or 277 VAC input, fixture is only dimmable with 0-10V dimming.

### CAUTION - RISK OF FIRE

This product requires installation by a qualified electrician. Before installing be sure to read all instructions and **TURN POWER OFF TO THE JUNCTION BOX**

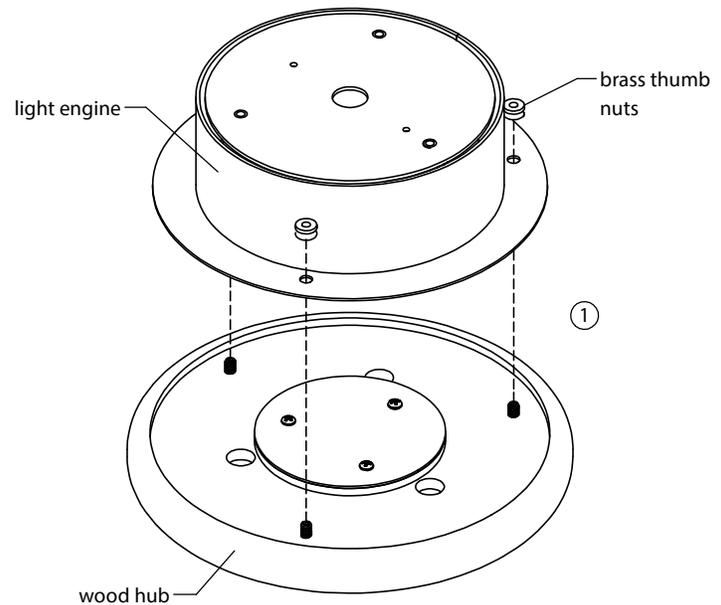

- ① Remove the wood hub from the fixture by removing the brass thumb nuts behind the hub.
- ② Reach into the light engine and remove the brass coupler then carefully remove the crossbar assembly from the fixture.
- ③ Make electrical connections between the driver input leads and the line voltage wires. Keep the wire connection in the junction box

**CRITICAL NOTE:** If 0-10V dimming control is to be used, connect purple and gray driver leads to 0-10V dimmer. Otherwise, the tinned ends of these leads should be snipped off and the leads should be capped individually such that they remain isolated from one another.

- ④ Attach the crossbar assembly to the junction box using the supplied #8-32 screws. Connect a bare ground wire to the green screw on the crossbar assembly.
- ⑤ Raise the shade up towards the junction box. The threaded nipple on the crossbar assembly should be centered with the center hole in the shade. Use the brass coupling with the toothlock washer to secure the shade tightly to the ceiling, covering the junction box.
- ⑥ Make electrical connections between the low voltage driver output leads and the fixture input leads using the supplied wire nuts. Keep the driver connections inside the light engine.
- ⑦ Align the screw heads on the wood hub with the holes on the light engine. Raise the wood hub up towards the fixture and secure the hub with the brass thumb nuts.

