

### **General Product information**


This product is suitable for indoor dry locations only.



### **CAUTION - RISK OF FIRE**




This product requires installation by a qualified electrician. Before installing be sure to read all instructions and TURN POWER OFF TO THE JUNCTION BOX



## Adjusting the Fixture Height

- Measure the desired height (H) that you want the fixture to hang below the ceiling.
- 2 Thread the cable through the top diffuser, shade, thumb nut, canopy, crossbar assembly, and washer. (See Figure 2)
- Tie a knot in the cable at the desired length H.





# **Making Electrical Connections**

4 Make electrical connections as shown in figure 2 using the supplied wire nuts.

#### **WARNING**

THE LED DRIVER IS A DC DEVICE AND MUST BE ATTACHED TO THE LED LIGHT ENGINE AS SHOWN. CONNECTING THIS DEVICE INCORRECTLY WILL CAUSE SEVERE DAMAGE.

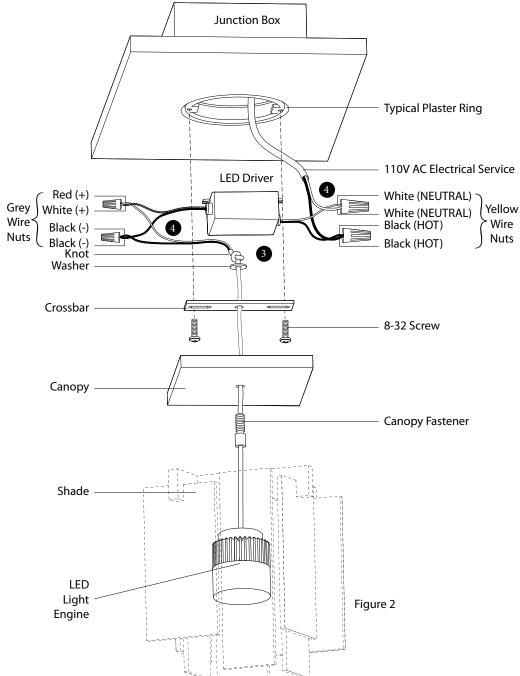

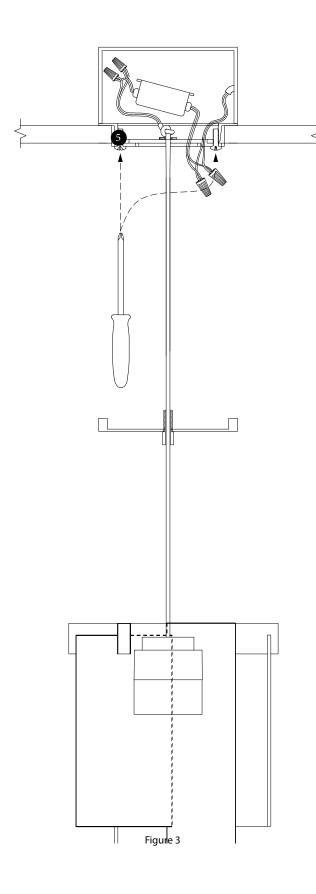

## Mounting the Fixture

5 Attach the crossbar to the junction box using the supplied 8-32 screws.

## Securing the Canopy

- 6 After electrical connections have been made, place line voltage connections and excess wire inside of the junction box.
- 7 Slide the canopy up the cable and secure it by screwing the canopy fastener into the crossbar.

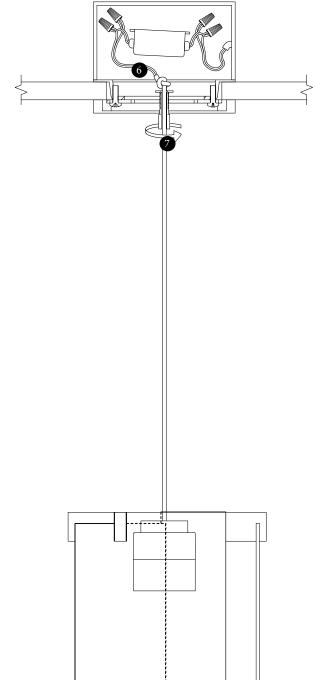


Figure 4