General Product Information



This product is suitable for indoor dry and damp locations only.

CAUTION - RISK OF FIRE /[¥. This product requires installation by a qualified

electrician. Before installing be sure to read all instructions and TURN POWER OFF TO THE JUNCTION BOX



 $C \in \cap \cap$


Attaching Light Engine to Shade



1 Thread the light engine wire through the center hub of the shade.


2 Thread the light engine wire through the thumb nut.

3 Screw the light engine top into the hub of the shade until tight. Tighten the cap nut on the top of the center hub.

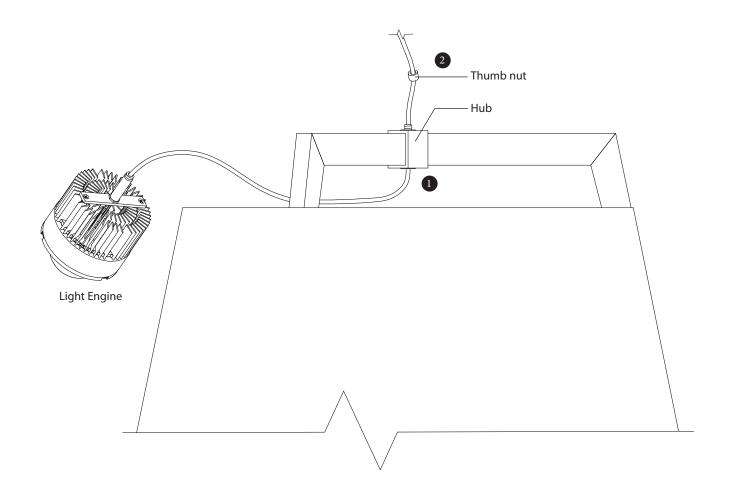

Imber / Ignis 17 (LED, Corded) Installation Instructions

$C \in \cap \cap O^{\circ}$

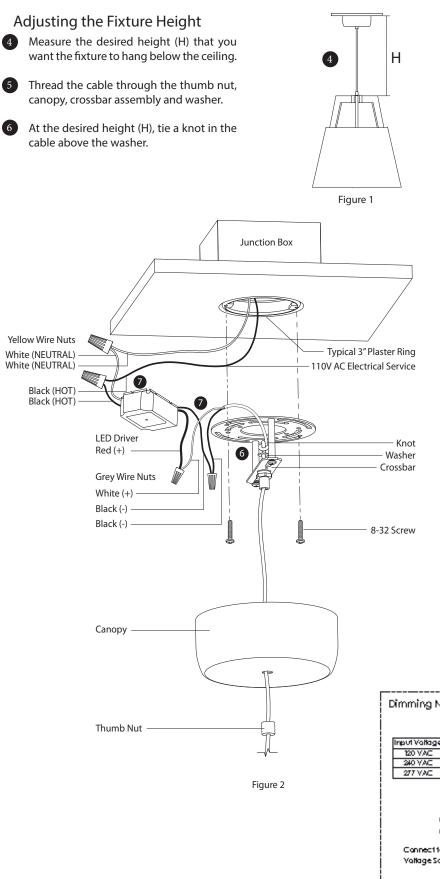


Making Electrical Connections

Make electrical connections as shown in figure 2 using the supplied wire nuts.


CRITICAL NOTE: If 0-10V dimming control is to be used, connect purple and gray driver leads to 0-10V dimmer. Otherwise, the tinned ends of the leads should be snipped off and the leads should be capped individually such that they remain isolated from one another.

WARNING

THE LED DRIVER IS A DC DEVICE AND MUST BE ATTACHED TO THE LED LIGHT ENGINE AS SHOWN. CONNECTING THIS DEVICE INCORRECTLY WILL CAUSE SEVERE DAMAGE.





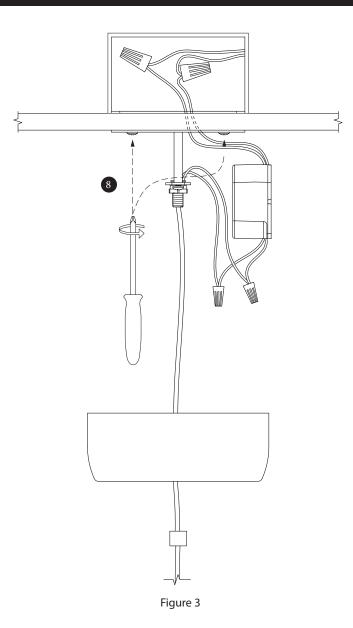


Mounting the Fixture

8 Attach the crossbar to the junction box using the supplied screws.

Securing the Canopy

- 9 After electrical connections have been made, place line voltage connections and excess wire inside of the junction box.
- Slide the canopy up the cable and secure it by screwing the canopy fastener into the crossbar. The driver can sit loosely inside of the Canopy beside the Crossbar.

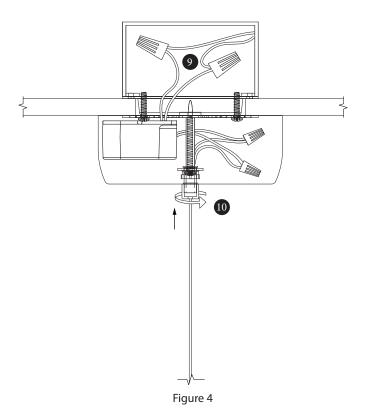

CERNOGROUP.COM