

Project Contact

Fill in the shaded boxes using the information listed below

Order Code	R-0060	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
MODEL													
EXAMPLE ORDER CODE	R-0060	-	R	-	049	-	060	-	095	-	30	-	F - EM




Textured Black exterior, Textured White interior, Walnut light engine disc, 3000K.





Distressed Brass exterior, Brushed Brass interior, White Washed Oak light engine disc.



Textured White exterior, Textured White interior, Walnut light engine disc.

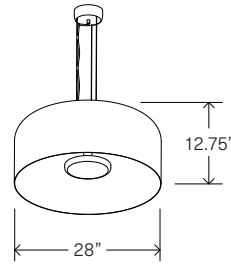


- (1) 1/4"Ø cord
- (3) 1/16"Ø suspension cables

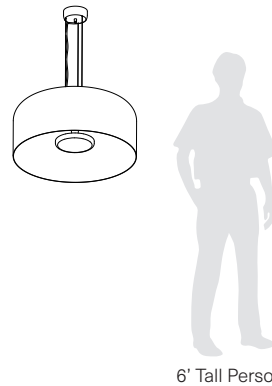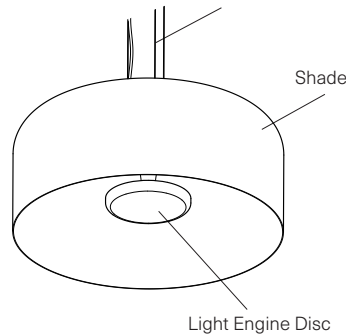

6' Tall Person

(A) SUSPENSION


W Corded White



B Corded Black

Canopy color will match cord color.

R Rigid Stem



Rigid stem and canopy matches finish of shade exterior.

(B) EXTERIOR SHADE FINISH

- 049** Textured Black
- 060** Textured White
- 119** Brushed Aluminum
- 120** Brushed Brass
- 117** Distressed Brass

(C) INTERIOR SHADE FINISH

- 060** Textured White
- 119** Brushed Aluminum*
- 120** Brushed Brass*
- 117** Distressed Brass*

*Finish will reduce delivered lumens.

(D) LIGHT ENGINE DISC

- 001** Walnut
- 002** Dark Stained Walnut
- 095** White Washed Oak
- 049** Textured Black
- 060** Textured White
- 119** Brushed Aluminum
- 120** Brushed Brass
- 117** Distressed Brass

(E) LAMPING CCT

- 27** 2700K LED
- 30** 3000K LED
- 35** 3500K LED
- 40** 4000K LED
- CRI 90+

(F) LIGHT OUTPUT

- F** Full Output - Wattage
 - R** 50% Reduced Output - Wattage
 - C** Custom Reduction Percentage
- Full output:
1945 Lumens (delivered)
30 Watts

Custom Reduction Percentage to reduce both lumens and wattage.

Full output based on Textured White shade interior with 3000K.

(G) OPTION CODE

- XD** For custom drop lengths add "XD" followed by desired *Overall Height* in inches at end of order code. Otherwise a standard 96" drop length is provided which is field cuttable.
- EM** Emergency Backup option.




FIXTURE SPECS

Dimensions: 28" Ø x 12.75"
 Materials: Spun Aluminum Shade, Solid Wood or Spun Metal Accent,
 Protective Powder Coated Finishes
 Product weight: 19 lb
 Light source: Integrated LED
 Light output: 1945 Lumens (Textured White shade interior)
 Color accuracy: 90+ CRI

DRIVER SPECS


120-277VAC Input
 0-10V dimming down to 1% with dim to off
 LED driver integrated into fixture

SUSPENSION



Corded Suspension
 Canopy 5" Ø X 2"H


- Textured White (CM-060) or Textured Black (CM-049)
- 3x 1/16" Stainless Steel Cables (CM-053)
- Field adjustable drop length: 1'0" min - 8'0" max
- Suitable for a sloped ceiling up to 30 degrees
- For extended cable length, please specify using XD designator in SKU builder
- 5-Conductor SVT Cable - color to match canopy (3 wires for AC power & ground, 2 wires for 0-10V dimming control)




Rigid Suspension
 Canopy 8" Ø X 0.38"H

- Stem and canopy finish to match exterior shade finish
- 0.5" Ø rigid stem black or white
- Field cuttable: 1'0" min - 8'0" max
- Suitable for a sloped ceiling up to 30 degrees
- For extended stem length, please specify using XD designator in SKU builder
- White 5-Conductor SVT Cable inside rigid stem (3 wires for AC power & ground, 2 wire for 0-10V dimming control)


PHOTOMETRIC POLAR GRAPH




Ⓑ EXTERIOR SHADE FINISH



Textured Black Powder Coat
CM-049




Textured White Powder Coat
CM-060



Brushed Aluminum
CM-119




Brushed Brass
CM-120



Distressed Brass
CM-117


Ⓒ INTERIOR SHADE FINISH




Textured White Powder Coat
CM-060



Brushed Aluminum
CM-119



Brushed Brass
CM-120



Distressed Brass
CM-117

Ⓓ LIGHT ENGINE DISC FINISH




Walnut
CM-001




Dark Stained Walnut
CM-002




White Washed Oak
CM-095



Textured Black Powder Coat
CM-049



Textured White Powder Coat
CM-060



Brushed Aluminum
CM-119



Brushed Brass
CM-120



Distressed Brass
CM-117