




Una 48, walnut




Una 66, white washed oak

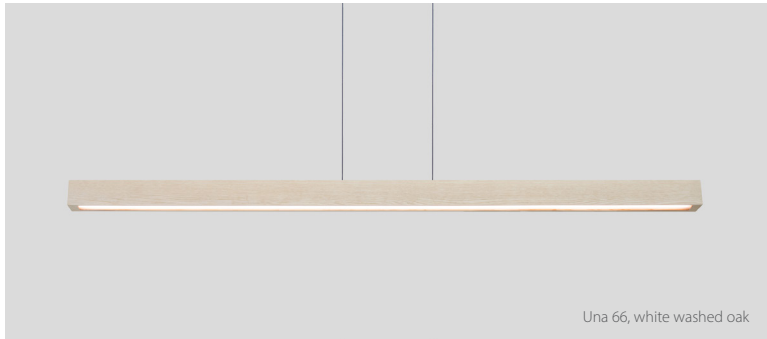


Una 48, walnut with uplight option

The Una Pendant is the culmination of many innovative fabrication techniques developed at Cerno. The fixture's exterior showcases the natural beauty of the solid wood construction. Ample light is shed into the room from recessed light sources that preserve the simple linear form.

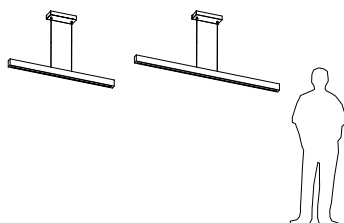

Una 48 / 66 linear pendant

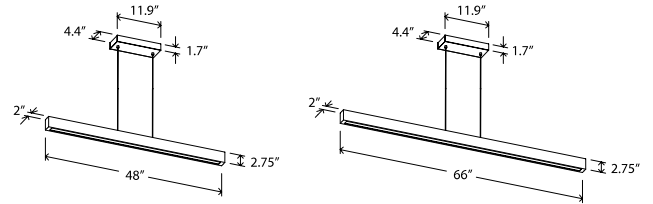


Una 48 dimensions: 48" x 2", 2.75"H
 Una 66 dimensions: 66" x 2", 2.75"H
 Materials: solid wood, polymer
 Una 48 weight: 8 lb - Una 66 weight: 10 lb
 Light source: integrated LED
 Una 48 Light output - downlight: 1915 Lumens (source)
 - (optional) uplight: 1330 Lumens (source)
 Una 66 Light output - downlight: 2710 Lumens (source)
 - (optional) uplight: 1330 Lumens (source)

Light color: 2700 K, 3000 K, 3500 K, or 4000 K
 Color accuracy: 90+ CRI
 Una 48 Power usage - downlight: 28 W
 - downlight & uplight 47 W
 Una 66 Power usage - downlight: 39 W
 - downlight & uplight 58 W

Dimmable (see driver section below)

Linear canopy included
 Canopy dimensions: 11.9" x 4.4", 1.7"
 Canopy finish: matte black (CM-085)
 See website for more canopy information
 Drop length field adjustable 0'-10", 8'-0" max
 Suitable for a sloped ceiling

Wood grain will vary
 Specifications subject to change




linear canopy in matte black (CM-085)

MATERIAL & FINISH OPTIONS

Una linear pendant part # 07-230-

Size	48	66
Wood Body	W	D
walnut (CM-001)		
dark stained walnut (CM-002)		
white washed oak (CM-095)		
Output Direction	D	B
downlight only		
uplight & downlight		
Lamping*	27	30
2700 K LED		
3000 K LED		
3500 K LED		
4000 K LED		
Driver	P1	
120 V AC input voltage		
TRIAC, ELV & 0-10 V dimming		



walnut (CM-001)



dark stained walnut (CM-002)



white washed oak (CM-095)

Includes: frosted polymer (CM-057)